



# OASIS Aquila Quasar

## Mains-Fed Water Cooler

OASIS Aquila Quasar is the next generation of mains-fed water coolers. This fully contactless unit is the trifecta: Designed for performance, maintenance and aesthetics, the OASIS Aquila Quasar has it all.

With a contactless activation, hydrating is a safer experience than ever! The user interface is intuitive and responsive. OASIS Aquila's tall dispense height means you can easily fill that large sports bottle! With the industry's only true point-of-dispense UVC LED, Quasar, you are guaranteed the purest drinking water as it kills 99.99% of pathogens while dispensing.

Designed for effortless servicing and sanitisation, the front door panel allows for easy access to filters.

OASIS Pressure Vessel Direct Chill Point technology provides a consistent delivery of chilled water; as the water enters the system, it passes into a pressure vessel and is chilled as it moves through to the point of dispense.

The unit's exterior is made of ABS plastic and matt black powder coated steel side panels, which are easy to sanitize. The interface has a contrasting high gloss finish - this gives the OASIS Aquila Quasar a timeless, elegant appearance.



	AMBIENT & COLD P1CMPVKY	HOT & COLD P1CMPVHSY
MODEL CODE	P1CMPVKY	P1CMPVHSY
ACTIVATION	Contactless	
FILTRATION	OASIS Green Filter (optional)	
DISINFECTION	Quasar UVC LED (point-of-dispense)	
FLOW RATE	2 LPM	
DRAINAGE TYPE	Removable drip-tray (dishwasher safe)	
EXTERIOR	ABS Plastic / Powder Coated Steel	
CHASSIS	Galvanised steel	
DIMENSIONS	1120(H)x 320(W) x 380(D) [mm]	
DISPENSE HEIGHT	320 mm	
WEIGHT	23.4 Kg	24.6 Kg
INPUT POWER	220-240V, 50/60 Hz	
COOLING PERFORMANCE	8.5 LPH (Below 10°C, 32°C Ambient, 27°C Inlet water)	
COLD TANK CAPACITY	1.5L	
HOT TANK CAPACITY	-	1.5L
TOTAL CURRENT	0.8 Amps	2.8 Amps
POWER CONS.	100 Watts	620 Watts
HEATING PERFORMANCE	-	7.9LPH
COUNTRY OF ORIGIN	Poland	
CERTIFICATIONS	CE (LVD, EMC, RoHS)	
WARRANTY	1 Year	



**CARBONATED WATER**

	<b>AMBIENT, COLD &amp; CARBO</b>	<b>HOT, COLD &amp; CARBO</b>
	<b>P1CMPVECKY</b>	<b>P1CMPVECHSY</b>
MODEL CODE		
ACTIVATION	Contactless	
FILTRATION	OASIS Green Filter (optional)	
DISINFECTION	Quasar UVC LED (point-of-dispense)	
FLOW RATE	2 LPM	
CARBONATION LEVELS	3.2 - 3.5 volumes	
DRAINAGE TYPE	Removable drip-tray (dishwasher safe)	
EXTERIOR	ABS Plastic / Powder Coated Steel	
CHASSIS	Galvanised steel	
DIMENSIONS	1120(H)x 320(W) x 380(D) [mm]	
DISPENSE HEIGHT	320 mm	
WEIGHT	30.4 Kg	31.7 Kg
INPUT POWER	220-240V, 50/60 Hz	
COOLING PERFORMANCE	8.5 LPH (Below 10°C, 32°C Ambient, 27°C Inlet water)	
CO2 PERFORMANCE	5.2 – 5.6 g/l	
COLD TANK CAPACITY	1.5L	-
HOT TANK CAPACITY	-	1.5L
TOTAL CURRENT	0.8 Amps	3 Amps
POWER CONS.	100 Watts	620 Watts
HEATING PERFORMANCE	-	7.9LPH
COUNTRY OF ORIGIN	Poland	
CERTIFICATIONS	CE (LVD, EMC, RoHS)	
WARRANTY	1 year	



**CONTACTLESS**


Follow the LED display to activate water - without pressing a thing! Intuitive and effective in the prevention of cross-contamination.

**QUASAR**

- UVC LED at point of dispense.
- Killing 99.99% of pathogens instantly as water flows.
- UVC-LEDs pulse on every 10 minutes for a short duration to keep the dispense point sanitized.

Quasar is installed at the point of dispense, ensuring the disinfection of potential pathogens and harmful bacteria that may be harboured at the spout. Worry no more about the quality of water (particularly when tooled with Green Filter)

Choose a unit with QUASAR to instantly kill Legionnaires and microorganisms responsible for Hospital Associated Infections

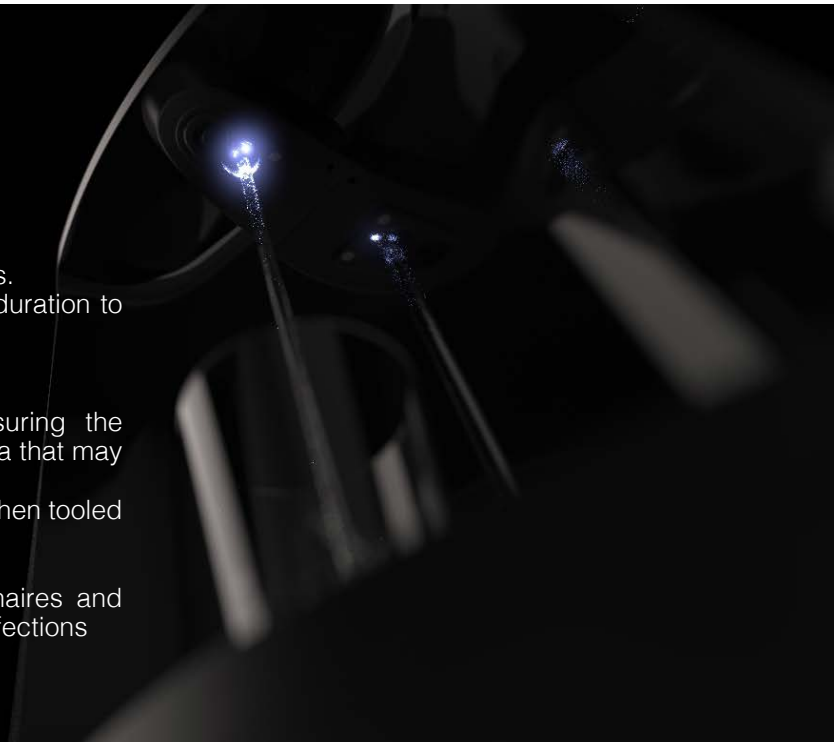

**PREVENT ACCIDENTS**

No Spills, No Slipping!

Unlike like conventional watercoolers, OASIS Aquila can be connected to a waste bottle, to avoid frequent drip-tray over-flows in high-traffic environments. Ensure the safety of your staff, patients and guest, by opting for the Autodrain option and avoiding this unwarranted hazard.

