



VERSACOOLER P8ACSLY ■ Manual, Refrigerated, Split-Level
VERSACOOLER PACSL ■ Manual, Non-Refrigerated, Split-Level
 Drinking Fountain

VersaCooler P8ACSLY

Delivering 60LPH of 10°C water at 21°C ambient.
 Cooling system uses R-134a refrigerant.

VersaCooler PACSL

Delivering ambient drinking water.




These split-level drinking fountain are manually activated via one of four push-pads.

Key Versacooler moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Complies with ANSI A117.1 and ADA. Shall comply with all relevant CE directives (LVD , EMC, RoHS). Shall comply with ANSI/NSF 61.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.

MODEL CODE	P8ACSLY	PACSL
ACTIVATION	Mechanical (Four push-pads)	
FILTRATION	Green Filter (optional), Built-in 100 micron strainer	
DISINFECTION	Ultra Blu V (optional)	
AUTO-OFF WATER FLOW	No	
DRAINAGE TYPE	Built in drain	
EXTERIOR	Antimicrobial ABS Plastic, Antimicrobial copper touch points, Brushed Stainless Steel	
CHASSIS	Heavy Duty Galvanised Steel	
DIMENSIONS	480(H) x 448(W) x 473(D) mm (each)	
NET WEIGHT	38 kg	13 kg
POWER SUPPLY	220-240V, 50/60 Hz	
COOLING PERFORMANCE	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)	Non-Refrigerated
FULL LOAD AMPS	2.2A	-
RATED WATTS	450 W	-
ENERGY SYSTEM	Refrigeration is on only when in use or if water temp increases during long period of standby.	
COUNTRY OF ORIGIN	Mexico	
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)	
WARRANTY	1 Year	

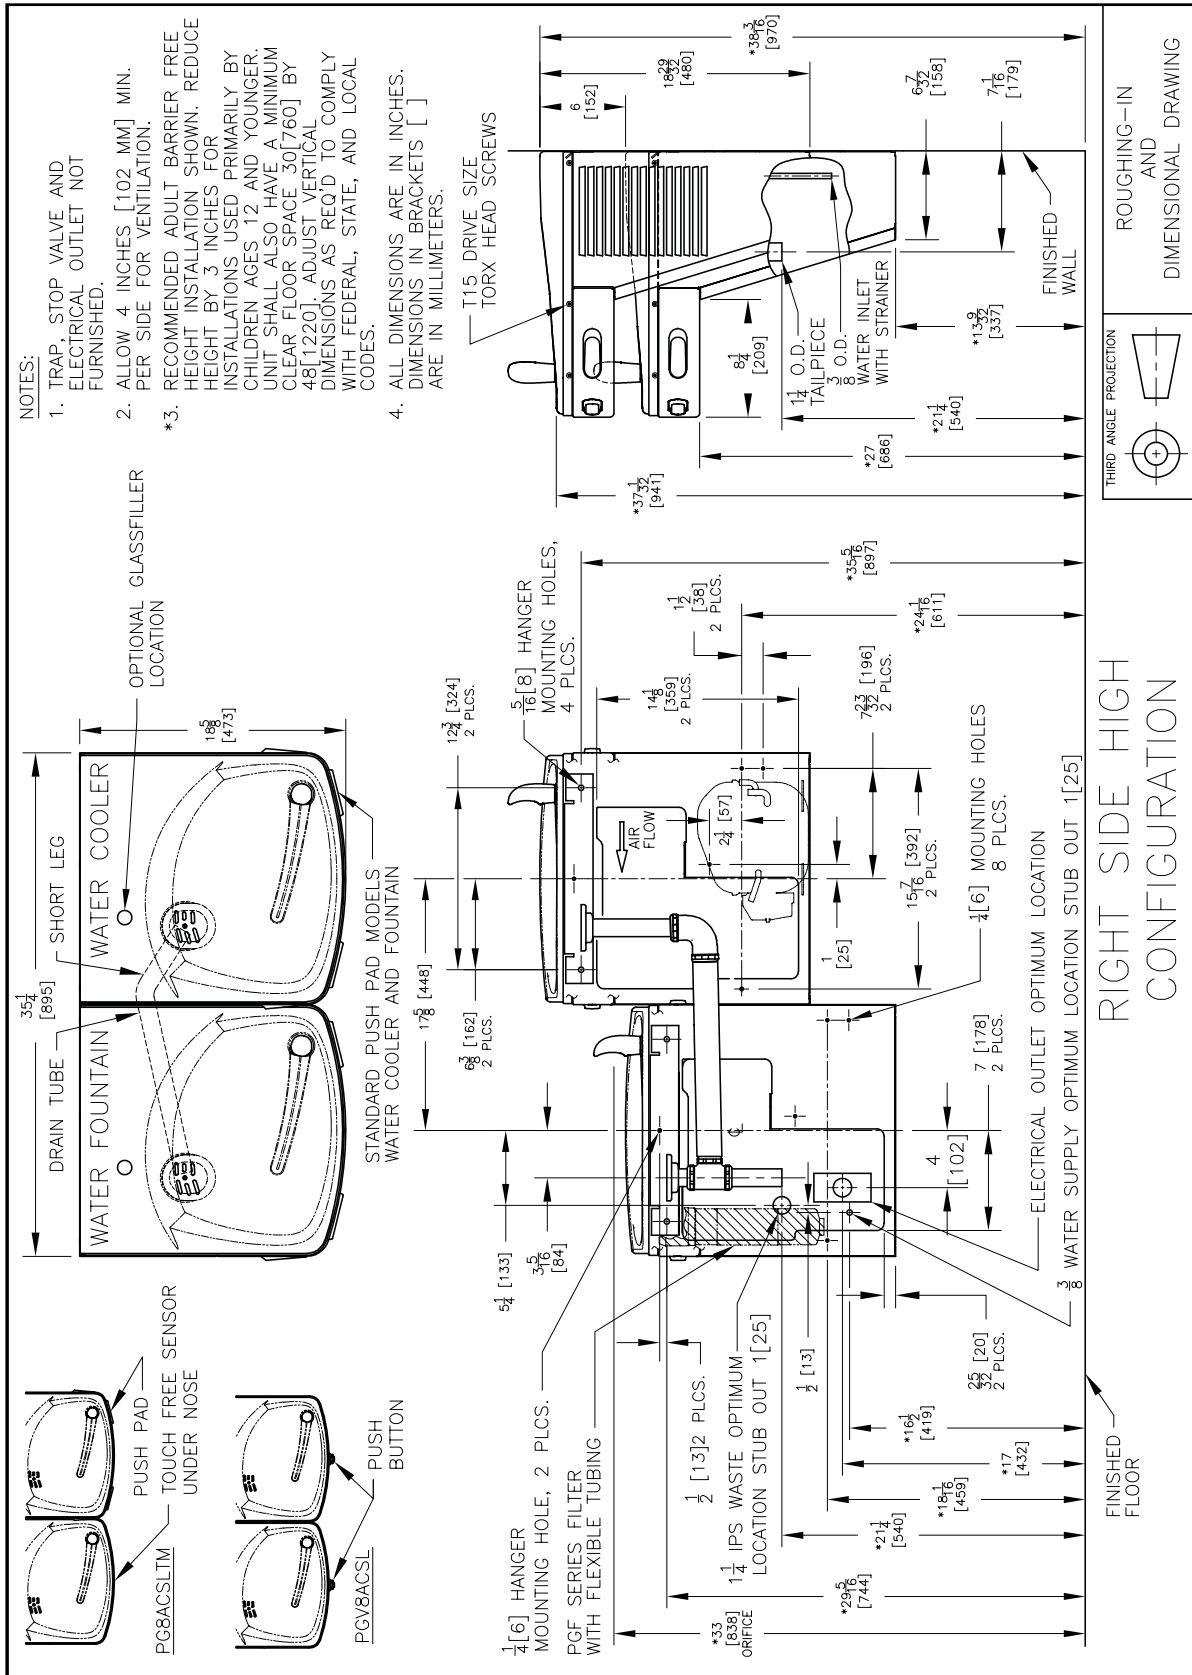

RIGHT SIDE HIGH CONFIGURATION



www.oasis.ie
www.oasisbottlefillers.com

info@oasis.ie

OASIS IRELAND
Bunree Industrial Estate, Ballina,
Co. Mayo, F26 D5R3, Ireland.

OASIS POLAND
ul. Gutenberga 20,
44-164, Gliwice, Poland

+353 96 71222

+48 32 332 65 01