



PLF8FPMCDY ■ Manual, Refrigerated
PLF12FPMCDY ■ Manual, Refrigerated
 Drinking Fountain

PLF8FPMCDY

Delivering 60LPH of 10°C water at 21°C ambient.
 Cooling system uses R-134a refrigerant.

PLF12FPMCDY

Delivering 90LPH of 10°C water at 21°C ambient.
 Cooling system uses R-134a refrigerant.

These surface mount drinking fountains are manually activated via the vandal-resistant touch-button.



These drinking fountains are fully recessed and have an integrated cup dispenser, proving to be a great space-saver.

Complies with ANSI A117.1 and ADA. Shall comply with all relevant CE directives (LVD , EMC, RoHS). Shall comply with ANSI/NSF 61.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



MODEL CODE	PLF8FPMCDY	PLF12FPMCDY
ACTIVATION	Mechanical (Constant Flow Bubblers)	
FILTRATION	Green Filter (optional), Built-in 100 micron strainer	
DISINFECTION	Ultra Blu V (optional)	
AUTO-OFF WATER FLOW	No	
DRAINAGE TYPE	Built in drain, Removable drip tray	
EXTERIOR CHASSIS	Brushed Stainless Steel Heavy Duty Galvanised Steel	
DIMENSIONS	1410(H) x 610(W) x 13(D) mm (274 recessed)	
NET WEIGHT	44 kg	76 kg
POWER SUPPLY	220-240V, 50/60 Hz	
COOLING PERFORMANCE	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)	90 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)
FULL LOAD AMPS	2.2A	3.7A
RATED WATTS	340 W	620 W
ENERGY SYSTEM	Refrigeration is on only when in use or if water temp increases during long period of standby.	
COUNTRY OF ORIGIN	Mexico	
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)	
WARRANTY	1 Year	

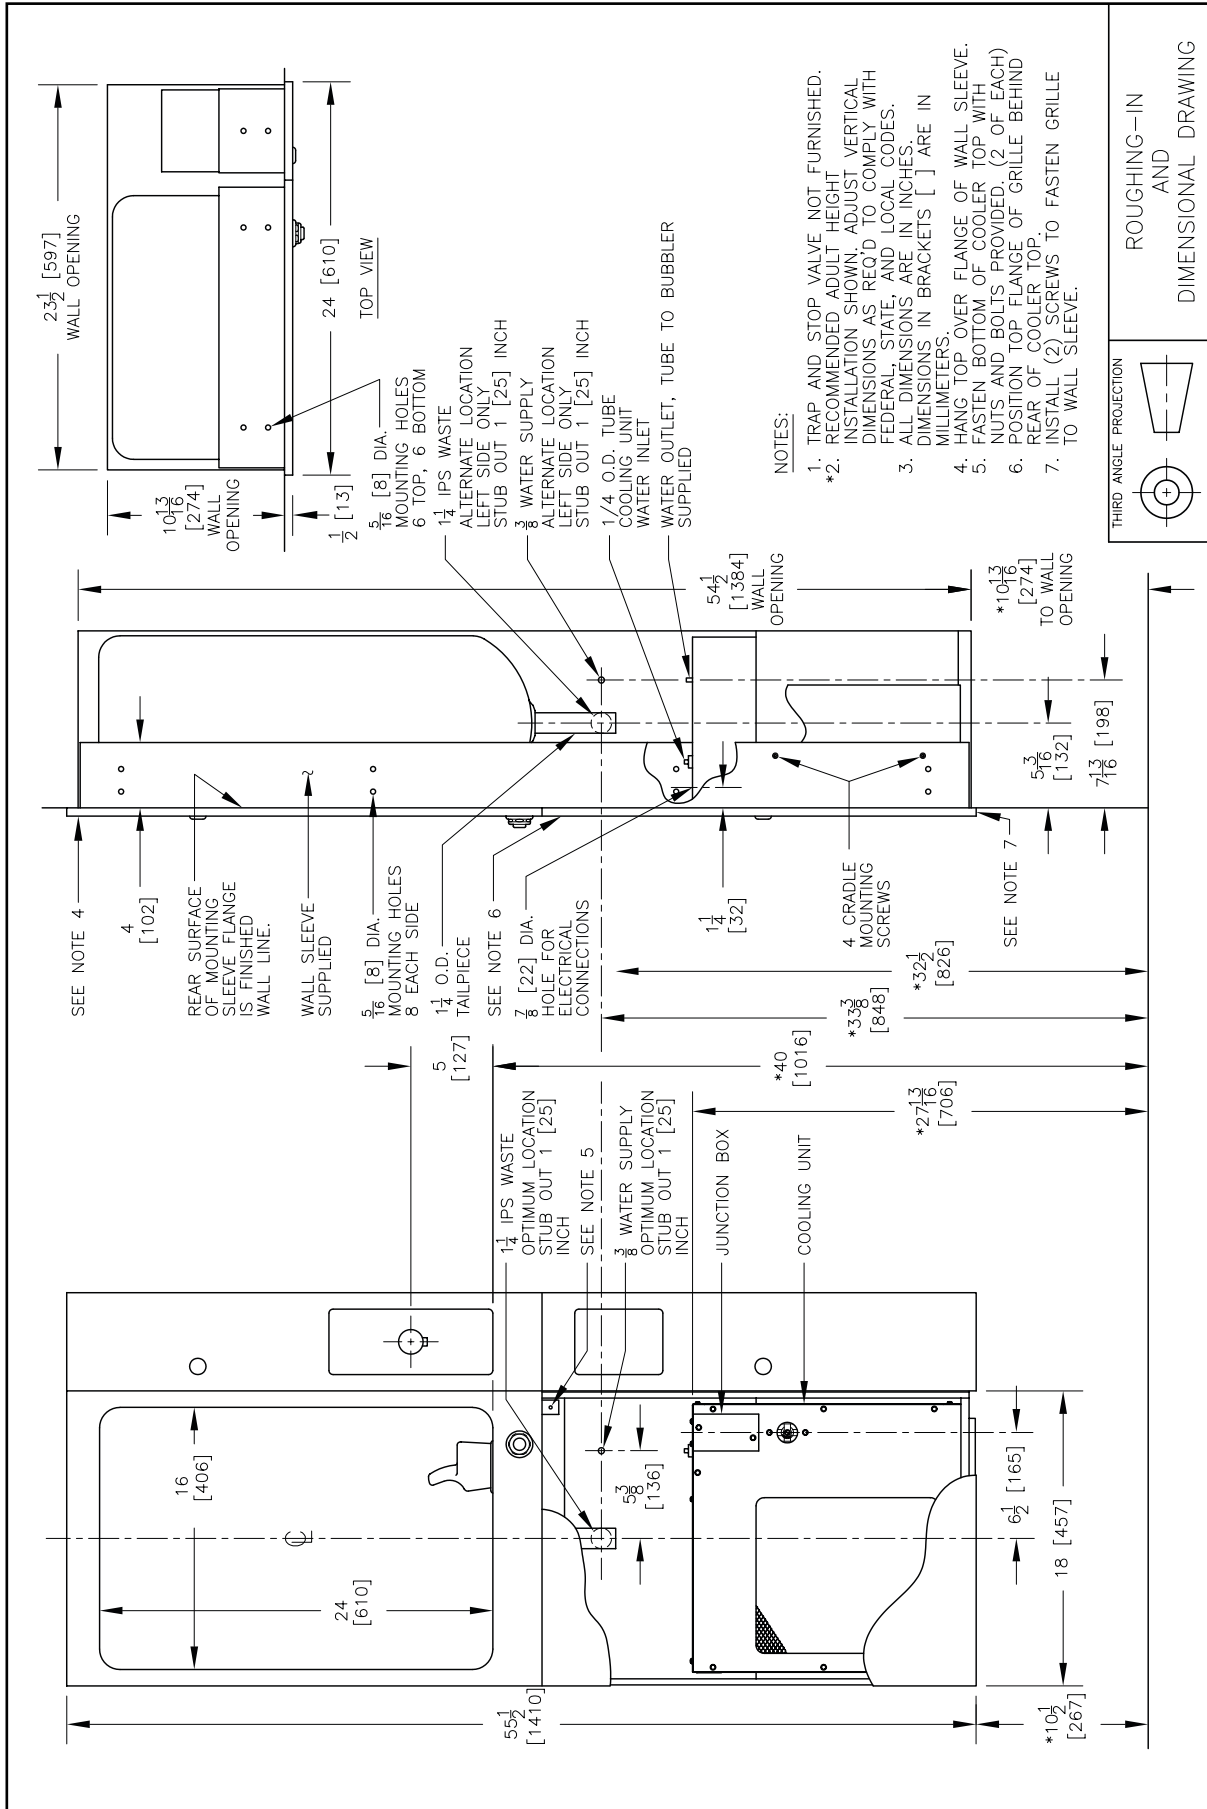

ROUGHING-IN AND DIMENSIONAL DRAWING



www.oasis.ie
www.oasisbottlefillers.com
info@oasis.ie

OASIS IRELAND
Bunree Industrial Estate, Ballina,
Co. Mayo, F26 D5R3, Ireland.
+353 96 71222

OASIS POLAND
ul.Gutenberga 20,
44-164, Gliwice, Poland
+48 32 332 65 01