



Hydration Stations

Bottle Fillers &
Drinking Fountains



OASIS | WATER WHERE YOU NEED IT

INDUSTRY

OASIS' Pressure Watercooler's cater to an endless variety of environment. Predominantly in public and social areas that share high volume of users on a daily basis.

Corporate Campuses	Offices, gyms, canteens, etc.
Transportation Depots	Train Stations, Airports, Bus depots, etc.
Healthcare	Hospitals, GP offices, etc.
Education	Schools, Universities, canteens, etc.

This is where product demand and sanitisation risks are both at their peaks.

With this in mind, OASIS continually ensures that our products are the most hygienic and healthful. With the incorporation of advanced technology and by accomplishing design & engineering feats, means that ease of sanitisation has never been easier.

Our units are sustainable, with reliability you can count on - just like our continuous support system we provide before and after sales.

Over **100** years of high quality design and manufacturing.



Contents

QUASAR			3
Bottle Filler Drinking Fountain Combo	On-Wall type (single & double)		5
	In-Wall modular		7
Bottle Fillers	Wall-Mount	In-Wall	9
		On-Wall	10
	Floor-Standing	Against-Wall	11
		Free Standing	12
Bottle Filler Retrofit Kit		13	
Bottle Filler Conversion Kit		14	
Drinking Fountain	On-Wall Sink type (single & double)		15
	Modular type	Non-refrigerated	17
		Refrigerated	19
	Free-Standing		21
ETC.		22	
Accessories		23	

QUASAR

UVC-LED Water treatment


Exclusively through OASIS

The OASIS® **QUASAR UVC-LED Water Treatment** system uses UVC-LEDs to protect people from Legionella and other harmful pathogens. Treating water at the point of dispense, QUASAR uses Light Emitting Diodes (LEDs) to generate high levels of UV photons. The rays are directed at viruses, bacteria, and other pathogens within drinking water to render those pathogens harmless in seconds.

UVC-LED Technology

UV represents wavelengths that fall between visible light and x-ray on the electromagnetic spectrum. UV photons penetrate harmful microscopic organisms and damage the DNA, rendering them incapable of reproduction.

UVC-LED technology is used to biologically destroy harmful bacteria and viruses, without the use of chemicals or mercury-based lamps. The UVC-LEDs allow for instant full-intensity power, unlimited cycling, and no heat transfer to the water.



QUASAR Bottle Fillers

Point-of-Dispense UVC treatment system

Features

Pathogen Control

UVC-LEDs disinfect the water when it is being dispensed reducing 99.99% of pathogens.

Pathogen Inactivation

Effective against a wide range of water-borne pathogens, including Legionella, Cryptosporidium, and Giardia.

Chemical Free

Provides physical treatment of water without the use of harmful chemicals or altering taste.

Contactless

Contactless Activation bottle filler with programmable auto shut off

Mercury Free

Conventional UV lamps contain mercury, a hazardous material which requires special disposal.

Freshshield

Alcove plastic is manufactured with our exclusive silver-based antimicrobial compound.

Long Life

UVC-LEDs will last ten years or more.

Extremely Low Power

UVC-LEDs do not transfer heat to the treated water.

Constant Protection

UVC-LEDs pulse on every 10 minutes to keep the dispense point sanitized.

Fail Safe

Prevents water from dispensing if the QUASAR unit becomes disconnected or fails.

Tether

Included tether allows bottle filler to tip forward for easier access to filters, without need to disconnect any water lines or fittings.

Filtration

Filtered models come with certified 3000 gallon lead, cyst, chlorine, taste, and odor reduction filter.

Available Models *Go to specific pages for detailed information.


Combo Stations

> page 5



Modular

> page 10



Surface Mount

> page 10



Free Standing

> page 11



Against Wall

> page 11



Retrofit Kit

> page 12



COMBO

ON-WALL type



Standard Features

Bottle Filler

- Built-in 100 micron strainer stops particles before they enter the waterway
- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- Water-saver bubbler reduces waste water by 50%
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers 'ON' only when in use or if water temp increases
- Waterways are Lead-Free in materials & construction
- Heavy duty galvanized steel frame
- Ample space within the bottle filler cabinet to add filtration, including all OASIS filters
- Brushed stainless steel finish
- Programmable automatic shut off timer

Drinking Fountain

- Antimicrobial flexible bubbler guard
- Basin is designed to eliminate splashing/standing water
- Water-saver bubbler reduces waste water by 50%
- Antimicrobial flexible bubbler guard
- External stream height adjustment
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers 'ON' only when in use or if water temp increases
-



Available Models

Contactless Combo



Contactless + Mechanical



Mechanical Combo



		P8EBFTY	PEBFTY	P8EBQY	PEBQY	P8EBFY	PEBFY	PV8EBFY	PVEBFY	P8SBFY	PSBF	PV8SBFY	PVSBF
10° C Drinking water/ 21° C Ambient air temp.	Rated capacity	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-
	Base rate	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-
220-240 Volts, 50/60 Hz	Compressor	1/4 HP	-	1/4 HP	-	1/4 HP	-	1/4 HP	-	1/4 HP	-	1/4 HP	-
	Full load Amps	2.2 A	0.1 A	2.2 A	0.1 A	2.2 A	0.1 A	2.2 A	0.1 A	2.2 A	-	2.2 A	-
	Rated watts	457 W	7 W	457 W	7 W	457 W	7 W	457 W	7 W	450 W	-	450 W	-
	Net weight	31 kg	16 kg	31 kg	16 kg	31 kg	16 kg	31 kg	16 kg	31 kg	16 kg	31 kg	16 kg
	Dispense height	292 mm	330 mm	292 mm	292 mm	330 mm	330 mm	330 mm	330 mm	250 mm	250 mm	250 mm	250 mm
Dimensions		960(h) x 413(w) x 473(d) mm											



		P8EBQSLTTY	P8EBFSLTTY	PEBFSLTTY	P8EBFSLY	PEBFSLY	PV8EBFSLY	PVEBFSLY	P8SBFSLY	PSBFSL	PV8SBFSLY	PVSBFSL	
10° C Drinking water/ 21° C Ambient air temp.	Rated capacity	60 LPH	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	
	Base rate	60 LPH	60 LPH	-	30 LPH	-	30 LPH	-	60 LPH	-	60 LPH	-	
220-240 Volts, 50/60 Hz	Compressor	1/4 HP	1/4 HP	-	1/4 HP	-	1/4 HP	-	1/4 HP	-	1/4 HP	-	
	Full load Amps	2.2 A	2.2 A	0.1 A	2.2 A	0.1 A	2.2 A	0.1 A	2.2 A	-	2.2 A	-	
	Rated watts	457 W	457 W	7 W	457 W	7 W	457 W	7 W	450 W	-	450 W	-	
	Net weight	43 kg	43 kg	27 kg	43 kg	27 kg	43 kg	27 kg	43 kg	27 kg	43 kg	27 kg	
	Dispense height	292 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm	250 mm	250 mm	250 mm	250 mm	
Dimensions		960(h) x 895(w) x 473(d) mm											

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

COMBO

IN-WALL(Recessed) type



Standard Features

Bottle Filler

- Built-in 100 micron strainer stops particles before they enter the waterway
- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers 'ON' only when in use or if water temp increases
- Waterways are Lead-Free in materials/construction
- Heavy duty galvanized steel frame
- Brushed stainless steel finish
- Programmable automatic shut off timer

Drinking Fountain

- Flexible one piece water saver bubbler guard
- Built-in 100 micron strainer stops particles
- Waterways are Lead-Free in materials/construction
- Antimicrobial flexible bubbler guard
- Heavy duty galvanized steel frame
- Brushed stainless steel finish
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers 'ON' only when in use or if water temp increases
- Built in Panel Locks for easy access to chiller and filtration



Available Models



M8WREBFY  



M8WRSBFY 



M8EBFY  



M8SBFY  | MSBF



M8CREBFY  



M8CRSBFY 



M140REBFY 



M140RSBF



MMRSLEBFY 



MMRSLSBF

Specifications



10° C Drinking water/
21° C Ambient air temp.

220-240 Volts,
50/60 Hz

Rated capacity
Base rate
Compressor
Full load Amps
Rated watts
Net weight
Dispense height
Dimensions

	M8WREBFY	M8WRSBFY	M8EBFY	M8SBFY	MSBF	M8CREBFY	M8CRSBFY	M140REBFY	M140RSBF	MMRSLEBFY	MMRSLSBF
Rated capacity	60 LPH	60 LPH	90 LPH	60 LPH	-	60 LPH	60 LPH	-	-	-	-
Base rate	60 LPH	60 LPH	60 LPH	60 LPH	-	60 LPH	60 LPH	-	-	-	-
Compressor	1/4 HP	1/4 HP	1/4 HP	1/4 HP	-	1/4 HP	1/4 HP	-	-	-	-
Full load Amps	2.2 A	2.2 A	2.2 A	2.2 A	-	2.2 A	2.2 A	0.1A	-	0.1A	-
Rated watts	347 W	340 W	347 W	340 W	-	347 W	340 W	7 W	-	7 W	-
Net weight	64 kg	73 kg	73 kg	73 kg	49 kg	84 kg	82 kg	19 kg	21kg	39 kg	32kg
Dispense height	330 mm	265 mm	330 mm	330 mm	265 mm	330 mm	330 mm	330 mm	265 mm	330 mm	265 mm
Dimensions											

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

 Contactless  Contactless + Mechanical  Refrigerated

BOTTLE FILLERS

Wall Mounted type

Standard Features

- Built-in 100 micron strainer stops particles before they enter the waterway
- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers 'ON' only when in use or if water temp increases
- Waterways are Lead-Free in materials & construction
- Heavy duty galvanized steel frame
- Brushed stainless steel finish
- Programmable automatic shut off timer
- Refrigerant R-290a (Refrigerated model only)



Available Models

In Wall (Recessed)



MWEBQY  

MW8EBFY   
MWEBFY 

MW8SBFY 
MWSBF 

On Wall (Surface Mount)



MWSM8EBQY  

MWSM8EBFY   
MWSMEBFY 

PN8EBFY  

PWSMEBQY  

PWSMEBFY  

PWSMSBF 

Specifications

	MWEBQY	MW8EBFY	MWEBFY	MW8SBFY	MWSBF	MWSM8EBQY	MWSM8EBFY	MWSMEBFY	PN8EBFY	PWSMEBQY	PWSMEBFY	PWSMSBF	
10° C Drinking water/ 21° C Ambient air temp.	Rated capacity	-	60 LPH	-	60 LPH	-	60 LPH	60 LPH	-	28	-	-	-
	Base rate	-	60 LPH	-	60 LPH	-	60 LPH	60 LPH	-	28	-	-	-
	Compressor	-	1/4	-	1/4	-	1/4	1/4	-	-	-	-	-
220-240 Volts, 50/60 Hz	Full load Amps	0.1A	2.2A	0.1A	2.2A	-	2.2A	2.2A	0.1A	0.1A	0.1A	0.1A	-
	Rated watts	7 W	347 W	7 W	340 W	-	347 W	347 W	7 W	7 W	7 W	7 W	-
	Net weight	12 kg	35 kg	12 kg	35 kg	12 kg	35 kg	35 kg	12 kg	25.4 kg	5 kg	5 kg	5 kg
	Dispense height	292 mm	330 mm	330 mm	265 mm	265 mm	292 mm	330 mm	330 mm	330 mm	292 mm	330 mm	265 mm
	Dimensions	1035(h) x 502(w) x 46(d) (287recessed)				1051(h) x 530(w) x 150(d)			935/455/323	630(h) x 413(w) x 144(d)			

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice.
ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

 QUASAR  Contactless  Refrigerated

BOTTLE FILLERS

Floor Standing - Against Wall

Standard Features

- Contactless sensor for touch-free activation with 20 second shut-off timer
- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers 'ON' only when in use or if water temp increases
- Removable drip tray grill for easy cleaning
- Heavy duty galvanized steel frame
- Programmable automatic shut off timer
- Refrigerant R-290a (Refrigerated model only)
- Built in bottle counter, filter monitor and programmable time-out feature
- White painted standard finish
- Access Door for easy maintenance; simple access to filters and chiller
- Litter-Resistant sloped top
- Available in customizable colours and wrappings (MOQ & Leadtimes may vary)

QUASAR
 Contactless
 Refrigerated

Specifications		PFSZEBQY	PFXZEBFY	P8FSZEBQY	P8FSZEBFY
10° C Drinking water/ 21° C Ambient air temp.	Rated capacity	-	-	60 LPH	60 LPH
	Base rate	-	-	60 LPH	60 LPH
	Compressor	-	-	1/4 HP	1/4 HP
220-240 Volts, 50/60 Hz	Full load Amps	0.1A	”	4.8 A	”
	Rated watts	7W	”	550W	”
	Net weight	25 kg	”	55 kg	”
	Dispense height	265 mm	”	265 mm	”
	Dimensions	1470(h) x 385(w) x 150(d) mm	”	1525(h) x 600(w) x 300(d) mm	”



PFSZEBQY | PFXZEBFY

P8FSZEBQY | P8FSZEBFY

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

BOTTLE FILLERS

Floor Standing - Free Standing

Standard Features

- Contactless sensor for touch-free activation with 20 second shut-off timer
- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers 'ON' only when in use or if water temp increases
- Removable drip tray grill for easy cleaning
- Heavy duty galvanized steel frame
- Programmable automatic shut off timer
- Refrigerant R-290a (Refrigerated model only)
- Built in bottle counter, filter monitor and programmable time-out feature
- Durable brushed stainless steel finish
- 2-Stage Filtration system provides
- great tasting filtered water (PF20FSEBQY model only)

QUASAR
 Contactless
 Refrigerated

Specifications		PCP8EBQY	PCP8EBFY	PCPEBFY	PF20FSEBQY
10° C Drinking water/ 21° C Ambient air temp.	Rated capacity	60 LPH	60 LPH	-	150 LPH
	Base rate	60 LPH	60 LPH	-	150 LPH
	Compressor	1/4 HP	1/4 HP	-	-
220-240 Volts, 50/60 Hz	Full load Amps	2.2 A	2.2 A	0.1A	7.2 A
	Rated watts	457 W	457 W	7 W	950W
	Net weight	33.6 kg	33.6 kg	33.6 kg	44.5 kg
	Dispense height	292 mm	330 mm	330 mm	265 mm
	Dimensions	1250(h) x 300(w) x 300(d) mm			1525x384x415

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.



PCP8EBQY | PCP8EBFY | PCPEBFY

PF20FSEBQY

RETROFIT KIT

Drinking Fountain to Combo

Standard Features

Designed to fit existing OASIS PG8AC and select competitors' units

- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- Heavy duty galvanized steel frame
- Waterways are Lead-Free in materials and construction
- Brushed stainless steel finish



PWEBQY  | PWEBFY 

PWSBF

 QUASAR  Contactless

Specifications

	PWEBQY	PWEBFY	PWSBF
10° C Drinking water / 21° C Ambient air temp.			
Rated capacity	-	-	-
Base rate	-	-	-
Compressor	-	-	-
220-240 Volts, 50/60 Hz			
Full load Amps	0.1A	0.1A	-
Rated watts	7 W	7 W	-
Net weight	5 kg	5 kg	5 kg
Dispense height	292 mm	330 mm	250 mm
Dimensions	480(h) x 413(w) x 153(d) mm		480 x 413 x 162

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

CONVERSION KIT

Drinking Fountain to Bottle Filler


Standard Features

Convert an existing Drinking Fountain to a Bottle Filler in moments. (Converts Elkay® EZ and LZ series)

- Contactless activation with shut off timer
- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- Side access panels to filters
- Heavy duty galvanized steel frame
- Waterways are Lead-Free in materials and construction
- Brushed stainless steel finish



NNEBFPG 

 QUASAR
  Contactless

Specifications

NNEBFPG

10° C Drinking water / 21° C Ambient air temp.	Rated capacity	-
	Base rate	-
	Compressor	-
220-240 Volts, 50/60 Hz	Full load Amps	0.1A
	Rated watts	7 W
	Net weight	8 kg
	Dispense height	330 mm
	Dimensions	935(h) x 454(w) x 323(d) mm

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

DRINKING FOUNTAINS

On-Wall, Sink type

Standard Features

- Built-in 100 micron strainer stops particles before they enter the waterway
- ADA compliant for both adult or child when properly installed
- Stainless steel top designed to eliminate splashing and standing water
- ANSI/NSF 61
- Water-saver bubbler reduces waste water by 50%
- Antimicrobial flexible bubbler guard
- External stream height adjustment
- Brushed stainless steel finish
- Heavy duty galvanized steel frame
- Refrigerant R-290a (Refrigerated models only)
- High efficiency cooling tank and coil (Refrigerated models only)
- Contactless Activation with 30 seconds auto shut-off (Contactless models)
- Vandal Resistant front push button with Tamper Proof screws (Vandal Resistant Model)

Antimicrobial flexible bubbler guard & Water-saver bubbler



Available Models



P8ACTY  



P8ACY  | PAC



PV8ACY   | PVAC 



PV8ACY-14G   



P8ACSLTTY  



P8ACSLTMY  



P8ACSLY  | PACSL



PV8ACSLY   | PVACSL 



PV8ACSLY-14G   

Specifications

		P8ACTY	P8ACY	PAC	PV8ACY	PVAC	PV8ACY-14G	P8ACSLTTY	P8ACSLTMY	P8ACSLY	PACSL	PV8ACSLY	PVACSL
10° C Drinking water/ 21° C Ambient air temp.	Rated capacity	60 LPH	60 LPH	-	60 LPH	-	60 LPH	60 LPH	60 LPH	60 LPH	-	60 LPH	-
	Base rate	60 LPH	60 LPH	-	60 LPH	-	60 LPH	60 LPH	60 LPH	60 LPH	-	60 LPH	-
	Compressor	1/4 HP	1/4 HP	-	1/4 HP	-	1/4 HP	1/4 HP	1/4 HP	1/4 HP	-	1/4 HP	-
220-240 Volts, 50/60 Hz	Full load Amps	2.2 A	2.2 A	-	2.2 A	-	2.2 A	2.2 A	2.2 A	2.2 A	-	2.2 A	-
	Rated watts	450W	450W	-	450W	-	450W	450W	450W	450W	-	450W	-
	Net weight	27 kg	27 kg	11 kg	27 kg	11 kg	34 kg	38 kg	38 kg	38 kg	23 kg	38 kg	38 kg
	Dispense height	-	-	-	-	-	-	-	-	-	-	-	-
	Dimensions	480(h) x 448(w) x 473(d)mm						633(h) x 895(w) x 473(d)mm					

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

 QUASAR

 Contactless

 Contactless + Mechanical

 Refrigerated

 Vandal Resistant

 Heavy Duty (14Gauge)

DRINKING FOUNTAINS

Modular & Non-Refrigerated type




Standard Features


- Flex bubbler
- Waterways are Lead-Free in materials and construction
- Antimicrobial copper touch points
- Stainless steel finish with heavy-duty galvanized steel frame
- Modular fountains include back panel(s) and mounting frame(s)
- Frost proof fountains include back panel and control box assembly
- Built in 100 micron strainer stops particles before they enter the waterway

14 Gauge Models **14G**

- 14 gauge stainless steel construction
- Vandal resistant bubbler keyed into position
- Single vandal resistant mechanical activation
- Brass P-Trap
- Vandal resistant panel fasteners
- Stream height adjustment

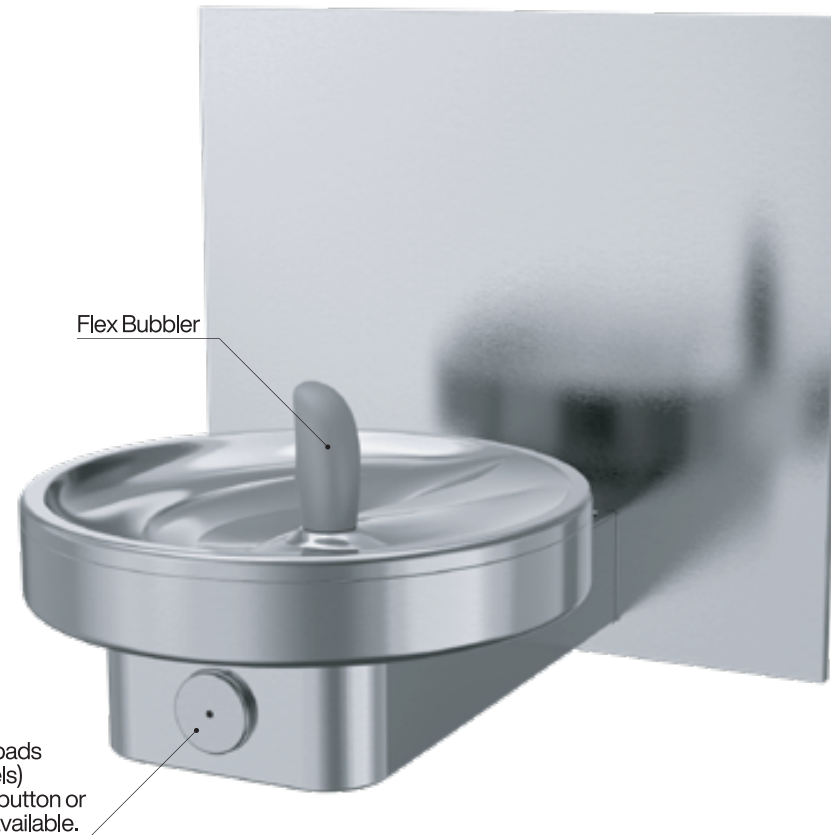

Available Models

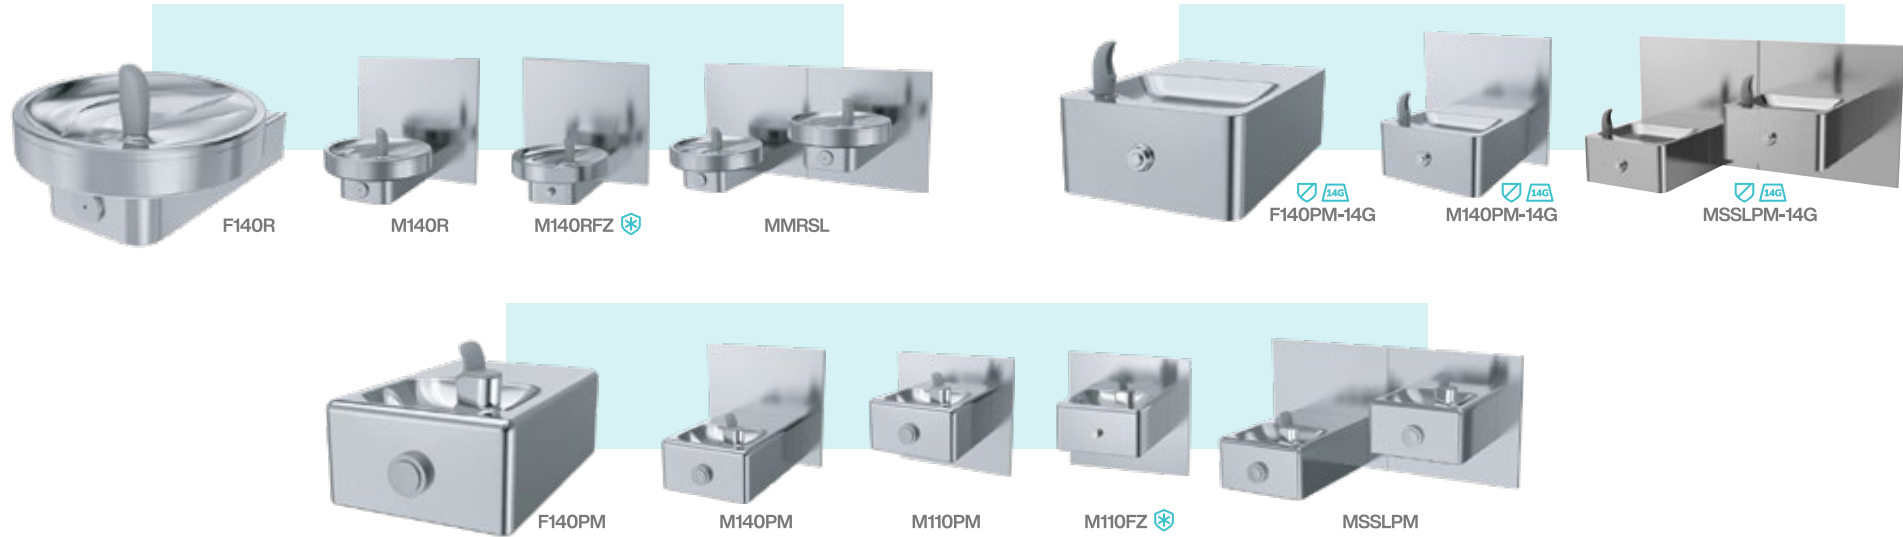

Specifications

	F140R	M140R	M140RFZ	MMRSL	F140PM-14G	M140PM-14G	MSSLPM-14G	F140PM	M140PM	M110PM	M110FZ	MSSLPM
10° C Drinking water/ 21° C Ambient air temp.												
Rated capacity	-	-	-	-	-	-	-	-	-	-	-	-
Base rate	-	-	-	-	-	-	-	-	-	-	-	-
Compressor	-	-	-	-	-	-	-	-	-	-	-	-
220-240 Volts, 50/60 Hz												
Full load Amps	-	-	-	-	-	-	-	-	-	-	-	-
Rated watts	-	-	-	-	-	-	-	-	-	-	-	-
Net weight	8.6 kg	14 kg	21 kg	29 kg	11 kg	29 kg	58 kg	5.9 kg	13 kg	9 kg	19.5 kg	26.8 kg
Dispense height	-	-	-	-	-	-	-	-	-	-	-	-
Dimensions(HxWxD mm)	209x502x470	464x502x483	464x502x483	464x1003x483	276x305x473	464x502x473	457x914x473	276x330x483	464x502x483	464x502x410	464x502x410	464x1003x483

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

Frost Resistant Vandal Resistant Heavy Duty (14 Gauge)

DRINKING FOUNTAINS

In-Wall, Modular & Refrigerated type



Standard Features

- Flex bubbler
- Waterways are Lead-Free in materials and construction
- Stainless steel finish with heavy-duty galvanized steel frame
- Built in 100 micron strainer stops particles before they enter the waterway
- Contactless models are sensor equipped for automatic operation
- Bi-level models are field reversible



Radii Models

- ADA Compliant when installed in an alcove or with right and left wing walls
- Water flow stops after 30 seconds if user does not move away



Available Models

*Radii Drinking Fountains

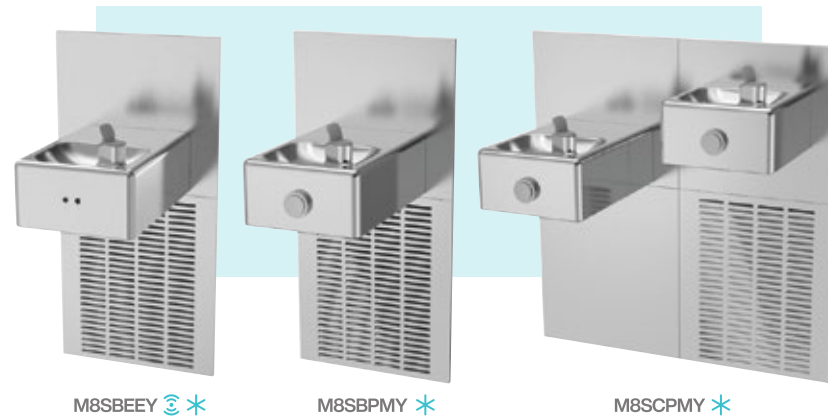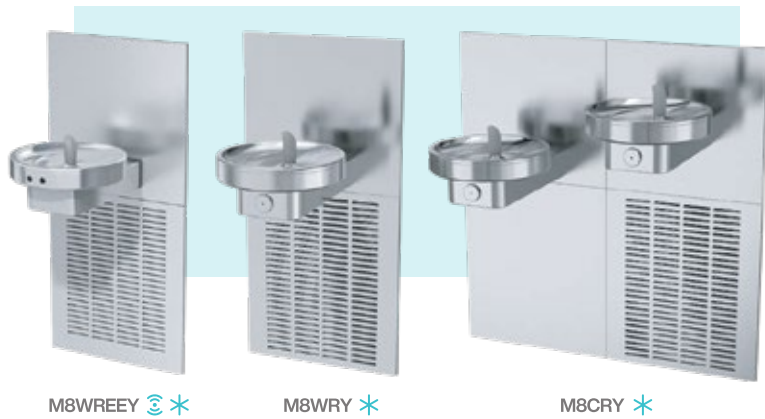

*Fully Recessed



Specifications

10° C Drinking water/
21° C Ambient air temp.

220-240 Volts,
50/60 Hz

Rated capacity
Base rate
Compressor
Full load Amps
Rated watts
Net weight
Dispense height
Dimensions

	M8WREEY	M8WRY	M8CRY	M8SBEEY	M8SBPMY	M8SCPMY	PLF8FPMY	PLF8FPMCDY
Rated capacity	60 LPH		60 LPH	60 LPH	60 LPH	60 LPH	60 LPH	60 LPH
Base rate	60 LPH		60 LPH	60 LPH	60 LPH	60 LPH	60 LPH	60 LPH
Compressor	1/4 HP		1/4 HP	1/4 HP	1/4 HP	1/4 HP	1/4 HP	1/4 HP
Full load Amps	2.2 A	”	2.2 A	2.2 A	2.2 A	2.2 A	2.2 A	2.2 A
Rated watts	340 W		340 W	550 W	340 W	340 W	340 W	340 W
Net weight	45kg		61kg	44 kg	44 kg	59 kg	42 kg	44 kg
Dispense height	-		-	-	-	-	-	-
Dimensions	2035(h) x 502(w) x 483(d) (287 recessed)		2035 x 1003 x 483 (287 recessed)	2035(h) x 502(w) x 483(d) (287 recessed)		2035 x 1003 x 483 (287 recessed)	1410 x 457 x 13 (275 recessed)	1410 x 610 x 13 (275 recessed)

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

DRINKING FOUNTAINS

Free Standing type

Standard Features

- Dial-A-Drink, Adjustable Bubbler (Excluding Colorado)
- Waterways are Lead-Free in materials and construction
- Optional push handle glass filler (029603-004)
- Stainless steel finish with heavy-duty galvanized steel frame



PLF3CPY * | PLF8CPY *



Colorado - P2KXY *



PLF8FAY * | PLF8FAHY *

Specifications

10° C Drinking water/
21° C Ambient air temp.

220-240 Volts,
50/60 Hz

Rated capacity
Base rate
Compressor
Full load Amps
Rated watts
Net weight
Dispense height
Dimensions (HxWxD)

PLF3CPY

22 LPH
22 LPH
1/4 HP
1.2 A
170 W
30 kg
-
1121 x 305 x 305 mm

PLF8CPY

60 LPH
60 LPH
1/4 HP
2.5 A
340 W
32 kg
-

Colorado - P2KXY

20 LPH
20 LPH
1/20 HP
0.6 A
90 W
22 kg
-
1020x310x310

PLF8FAY

60 LPH
60 LPH
1/4 HP
2.5 A
320 W
43 kg
-
1100x432x356

PLF8FAHY

60 LPH
60 LPH
1/4 HP
2.2 A
340 W
44 kg
-

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

* Refrigerated

DRINKING FOUNTAINS ETC.

Counter Top

- Anti-Splash ridge
- Built-in pressure regulator assures smooth, steady water flow
- Satin finish stainless steel



FLF300R

Bracket Mounted

- Dial-A-Drink, Adjustable Bubbler
- Chrome-Plated brass strainer and tailpiece
- Stainless steel basin
- Satin finish stainless steel



FLF120

On-Wall type (Single)

- Dial-A-Drink, Adjustable Bubbler
- Stainless steel surfaces
- Anti-Splash ridge
- Easy-To-Clean integral strainer grid
- Bottom cover plate



F100

Fully Recessed (Single)

- Satin finish stainless steel surfaces
- Push-Button on cabinet front keeps water flowing while button is depressed
- Removable chrome-Plated brass drain strainer
- Built-in pressure regulator assures smooth, steady water flow



FLF211PM

Specifications

10° C Drinking water/
21° C Ambient air temp.

220-240 Volts,
50/60 Hz

Rated capacity
Base rate
Compressor
Full load Amps
Rated watts
Net weight
Dispense height
Dimensions (HxWxD)

FLF300R

-
-
-
-
-
3 kg
-
305 x 356 x 354

FLF120

-
-
-
-
-
3 kg
-
233x 330 x 333

F100

-
-
-
-
-
7 kg
-
225 x 432 x 331

FLF211PM

-
-
-
-
-
17.9 kg
-
889 x 457 x 13
(267 recessed)

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

Accessories

Water Chiller

- Easy Installation
- Waterways are Lead-Free in materials and construction
- High efficiency stainless steel cooling tank
- Made of heavy-gauge steel
- Refrigerant R-290a



RLF8Y

Specifications

		RLF8Y
	Type	Remote or In-A-Wall
10° C Drinking water/ 21° C Ambient air temp.	Rated capacity	60 LPH
	Base rate	60 LPH
220-240 Volts, 50/60 Hz	Compressor	1/4 HP
	Full load Amps	2.2 A
	Rated watts	340 W
	Net weight	24 kg
Dimensions (HxWxD)		406 x 417 x 262 mm

Bubblers



Antimicrobial Water Saver Flex type

One piece, Tamper-Proof, non-regulated antimicrobial bubbler for table-type drinking fountains and Radii models.

Part no. 035607-111



Metal

Tamper-Proof, chrome plated brass, and non-regulated antimicrobial bubbler for table-type drinking fountains and Radii models.

Part no. 036700-001



Adjustable (Flexible guard)

Dial-A-Drink Adjustable Bubbler with Flexible Bubbler Guard

Part no. 030774-006
Mains water pressure 20-100 psi

Part no. t 030774-015
Mains water pressure < 20 psi



Adjustable (Chrome plated guard)

Dial-A-Drink Adjustable Bubbler with Flexible Bubbler Guard

Part no. 030774-016
Mains water pressure 20-100 psi



Constant Flow

Constant flow bubbler with flexible bubbler guard

Part no. 030774-025

ETC.



OASIS green filter can be factory installed at an extra cost. Ask for our green filter price list and description.



Colorado Glass Filler

Chrome Glass filler for the Colorado (P2KXY) Free Standing Cooler.

Part no. 034912-001



Glass Filler

Chrome Glass Filler Assy, Push Handle

Part no. 029603-004




Trim Bezel

Trim Bezel fits OASIS PBAC Coolers.

Part no. 035173-003
Stainless Steel

Installation Kit

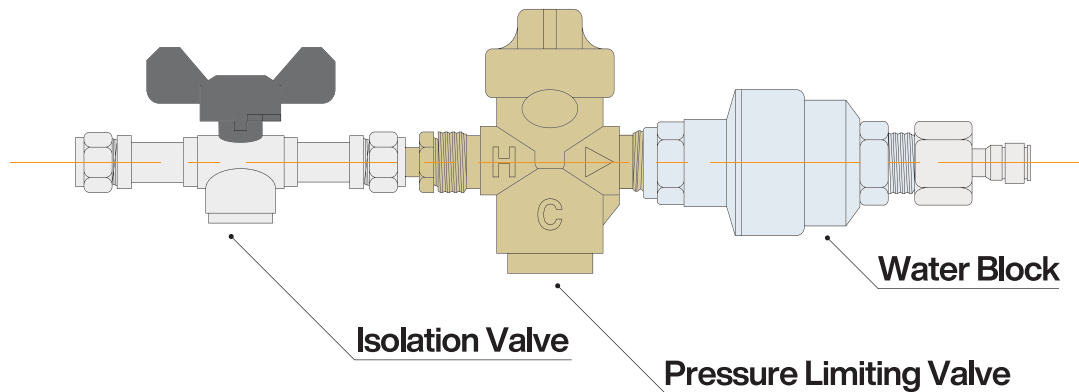

(Compression Fitting Version **034653-003**)

- This kit is an 'all in one rail', which when properly installed will regulate the feed water used to supply a water dispensing device.
- The kit includes an isolation valve with double non return, a pressure limiting valve set at 3 bar and a water block, which will stop the water flow if a pre set volume has been exceeded. The inlet of the kit is 15mm compression and the outlet is 1/4" push fit.
- This kit should only be fitted to a mains cold water supply / boosted mains, not a tank fed supply.
- The kit features twin 'type approved' non return valves and thereby complies with the current WRAS / EPDWA regulations for supplying coolers and carbonators.

Installation Procedure

The feed water kit should be fitted to a suitable 15mm mains cold water pipe made of copper. Alternative kits are available for plastic pipe work, please consult your supplier. The pipe work should be clean, free from bends / dents and should not be painted. The kit should be mounted vertically and in a position to allow for the access to individual components, for altering the settings.

Altering The Settings

To alter the maximum feed water pressure, turn the slot on top of the chrome pressure limiting valve either clock / anti - clockwise.

To alter the maximum volume of water to be discharged in any given instance, firstly remove the 3/4" x 1/4" adaptor from the outlet of the grey water block device. Inside the outlet there is a pointer that can be aligned with one of the figures around the circumference. Each figure equates to 1 gallon (3.8 litres). A standard kit is set on 2 (i.e. 9 litres). The maximum setting is approximately 50 litres.

OASIS IRELAND

Bunree Industrial Estate,
Ballina, Co. Mayo
Ireland, F26 D5R3
+353 96 71222

OASIS POLAND

ul.Gutenberg 20,
44-164, Gliwice, Poland
+48 32 332 65 01

www.oasis.ie
www.oasiscoolers.com
info@oasis.ie