

VERSAFILLER PEBFY Contactless + Manual, Non-Refrigerated VERSAFILLER P8EBFY Contactless + Manual, Refrigerated

Hydration Station Combo

This surface mount hydration station combo has two activation methods. The bottle filler includes an electronic sensor for a contactless (touch free) activation and a 30 second shut off timer. The drinking fountain is activated via one of four pushpads.


The Bottle Counter conveniently displays the number of times the unit has been used, encouraging the refill of sports bottles.

Key Versafiller moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



MODEL CODE	P8EBFY 503961E + 507000	PEBFY 507035
ACTIVATION	Bottle Filler: Contactless (Infrared sensor) Drinking Fountain: Manual (Four push-pads)	
SENSOR COVERAGE	Up to 5cm (approx.)	
FILTRATION	Green Filter (optional), Built-in 100 micron strainer	
DISINFECTION	-	
AUTO-OFF WATER FLOW	Bottle Filler: Yes ; Drinking Fountain: No	
DRAINAGE TYPE	Built in drain, Removable drip tray	
EXTERIOR	Antimicrobial ABS Plastic, Brushed Stainless Steel	
CHASSIS	Heavy Duty Galvanised Steel	
DIMENSIONS	960(H) × 413(W) × 473(D)	
ALCOVE HEIGHT	330 mm	
NET WEIGHT	31 kg	16 kg
POWER SUPPLY	220-240V, 50/60 Hz	
COOLING PERFORMANCE	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)	-
FULL LOAD AMPS	2.2A	0.1A
RATED WATTS	457 W	7 W
ENERGY SYSTEM	Refrigeration is on only when in use or if water temp increases during long period of standby.	-
COUNTRY OF ORIGIN	Mexico	
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS), WRAS	
WARRANTY	1 Year	

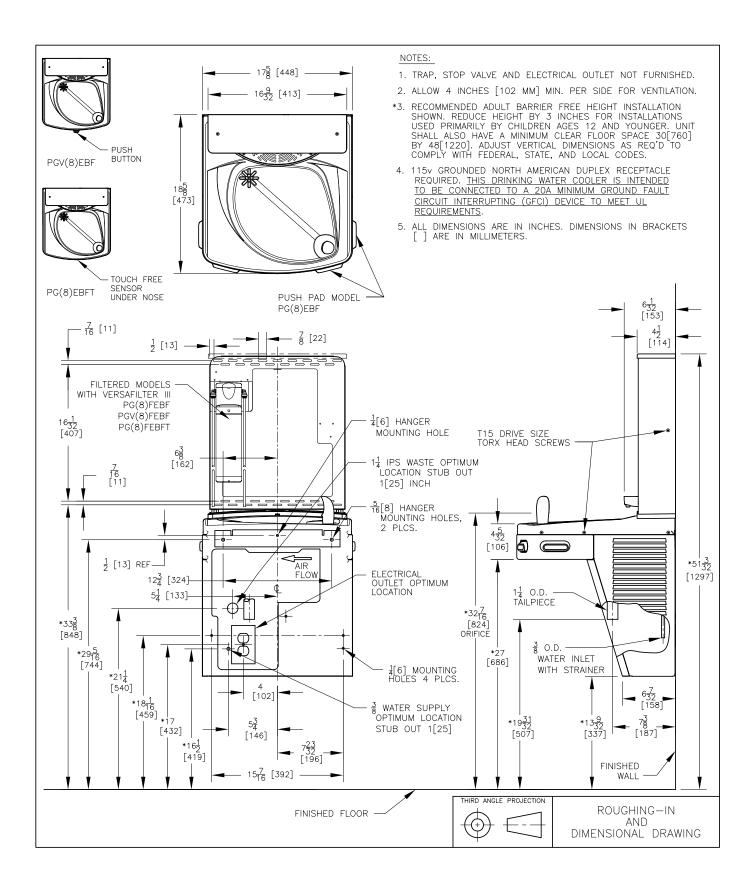



OASIS POLAND ul.Gutenberga 20, 44-164, Gliwice, Poland +48 32 332 65 01

OASIS IRELAND Bunree Industrial Estate, Ballina, Co. Mayo, F26 D5R3. Ireland. +353 96 71222

www.oasiscoolers.eu info@oasis.ie

CC E WRAS

EEC0004-S-2401