



**FREE STANDING PCP8EBQY** ■ Contactless, Refrigerated  
**FREE STANDING PCPEBQY** ■ Contactless, Non-Refrigerated  
 Bottle Filler

This free standing bottle filler includes an electronic sensor for a contactless (touch free) activation and a 30 second shut off timer.


Moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Complies with ANSI A117.1 and ADA. Shall comply with all relevant CE directives (LVD , EMC, RoHS). Shall comply with ANSI/NSF 61.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



| MODEL CODE          | PCP8EBQY 507222E  | PCPEBQY 507202   |
|---------------------|---|------------------|
| ACTIVATION          | Contactless (Infrared sensor)                                     |                  |
| SENSOR COVERAGE     | Up to 5cm (approx.)   |                  |
| FILTRATION          | Green Filter (optional), Built-in 100 micron strainer             |                  |
| DISINFECTION        | Quasar UVC-LED  |                  |
| AUTO-OFF WATER FLOW | Yes   |                  |
| DRAINAGE TYPE       | Built in drain, Removable drip tray                               |                  |
| EXTERIOR            | Antimicrobial ABS Plastic, Brushed Stainless Steel                |                  |
| CHASSIS             | Heavy Duty Galvanised Steel                                       |                  |
| DIMENSIONS          | 1262(H) x 304(W) x 339(D)   |                  |
| ALCOVE HEIGHT       | 292 mm  |                  |
| NET WEIGHT          | 33.6kg  | 16.8kg           |
| POWER SUPPLY        | 220-240V, 50/60 Hz  |                  |
| COOLING PERFORMANCE | 60 LPH<br>Rated Capacity & Base Rate<br>(10°C in 21°C amb. temp.) | Non-Refrigerated |
| FULL LOAD AMPS      | 2.2A  | 0.1A             |
| RATED WATTS         | 457W  | 7 W              |
| COUNTRY OF ORIGIN   | Mexico  |                  |
| CERTIFICATIONS      | ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)           |                  |
| WARRANTY            | 1 Year  |                  |

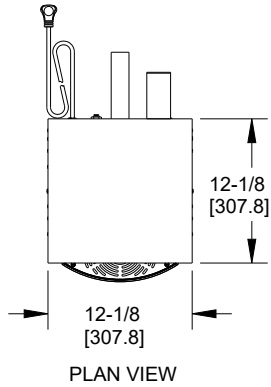

ALL DIMENSION ARE IN INCHES.  
DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.

ALLOW 4"[102] FOR VENTILATION AT THE REAR OF THE WATER COOLER AND THE SIDES IF SET IN AN ALCOVE OR NEAR A CORNER.

