



**PLF8FPMY** ■ Manual, Refrigerated  
**PLF12FPMY** ■ Manual, Refrigerated  
 Drinking Fountain

**PLF8FPMY**

Delivering 60LPH of 10°C water at 21°C ambient.  
 The cooling system uses R-134a or R-290a refrigerant.

**PLF12FPMY**

Delivering 90LPH of 10°C water at 21°C ambient.  
 The cooling system uses R-134a or R-290a refrigerant.

These surface mount drinking fountains are manually activated via the vandal-resistant touch-button.


These drinking fountains are fully recessed, proving to be a great space-saver.

Complies with ANSI A117.1 and ADA. Shall comply with all relevant CE directives (LVD , EMC, RoHS). Shall comply with ANSI/NSF 61.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



MODEL CODE	PLF8FPMY	PLF12FPMY
ACTIVATION	Mechanical (Constant Flow Bubbler)	
FILTRATION	Green Filter (optional), Built-in 100 micron strainer	
DISINFECTION	Ultra Blu V (optional)	
AUTO-OFF WATER FLOW	No	
DRAINAGE TYPE	Built in drain, Removable drip tray	
EXTERIOR CHASSIS	Brushed Stainless Steel Heavy Duty Galvanised Steel	
DIMENSIONS	1410(H) x 457(W) x 13(D) mm (275 recessed)	
NET WEIGHT	42 kg	44 kg
POWER SUPPLY	220-240V, 50/60 Hz	
COOLING PERFORMANCE	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)	90 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)
FULL LOAD AMPS	2.2A	3.7A
RATED WATTS	340 W	620 W
ENERGY SYSTEM	Refrigeration is on only when in use or if water temp increases during long period of standby.	
COUNTRY OF ORIGIN	Mexico	
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)	
WARRANTY	www.oasiscoolers.com 1 Year	

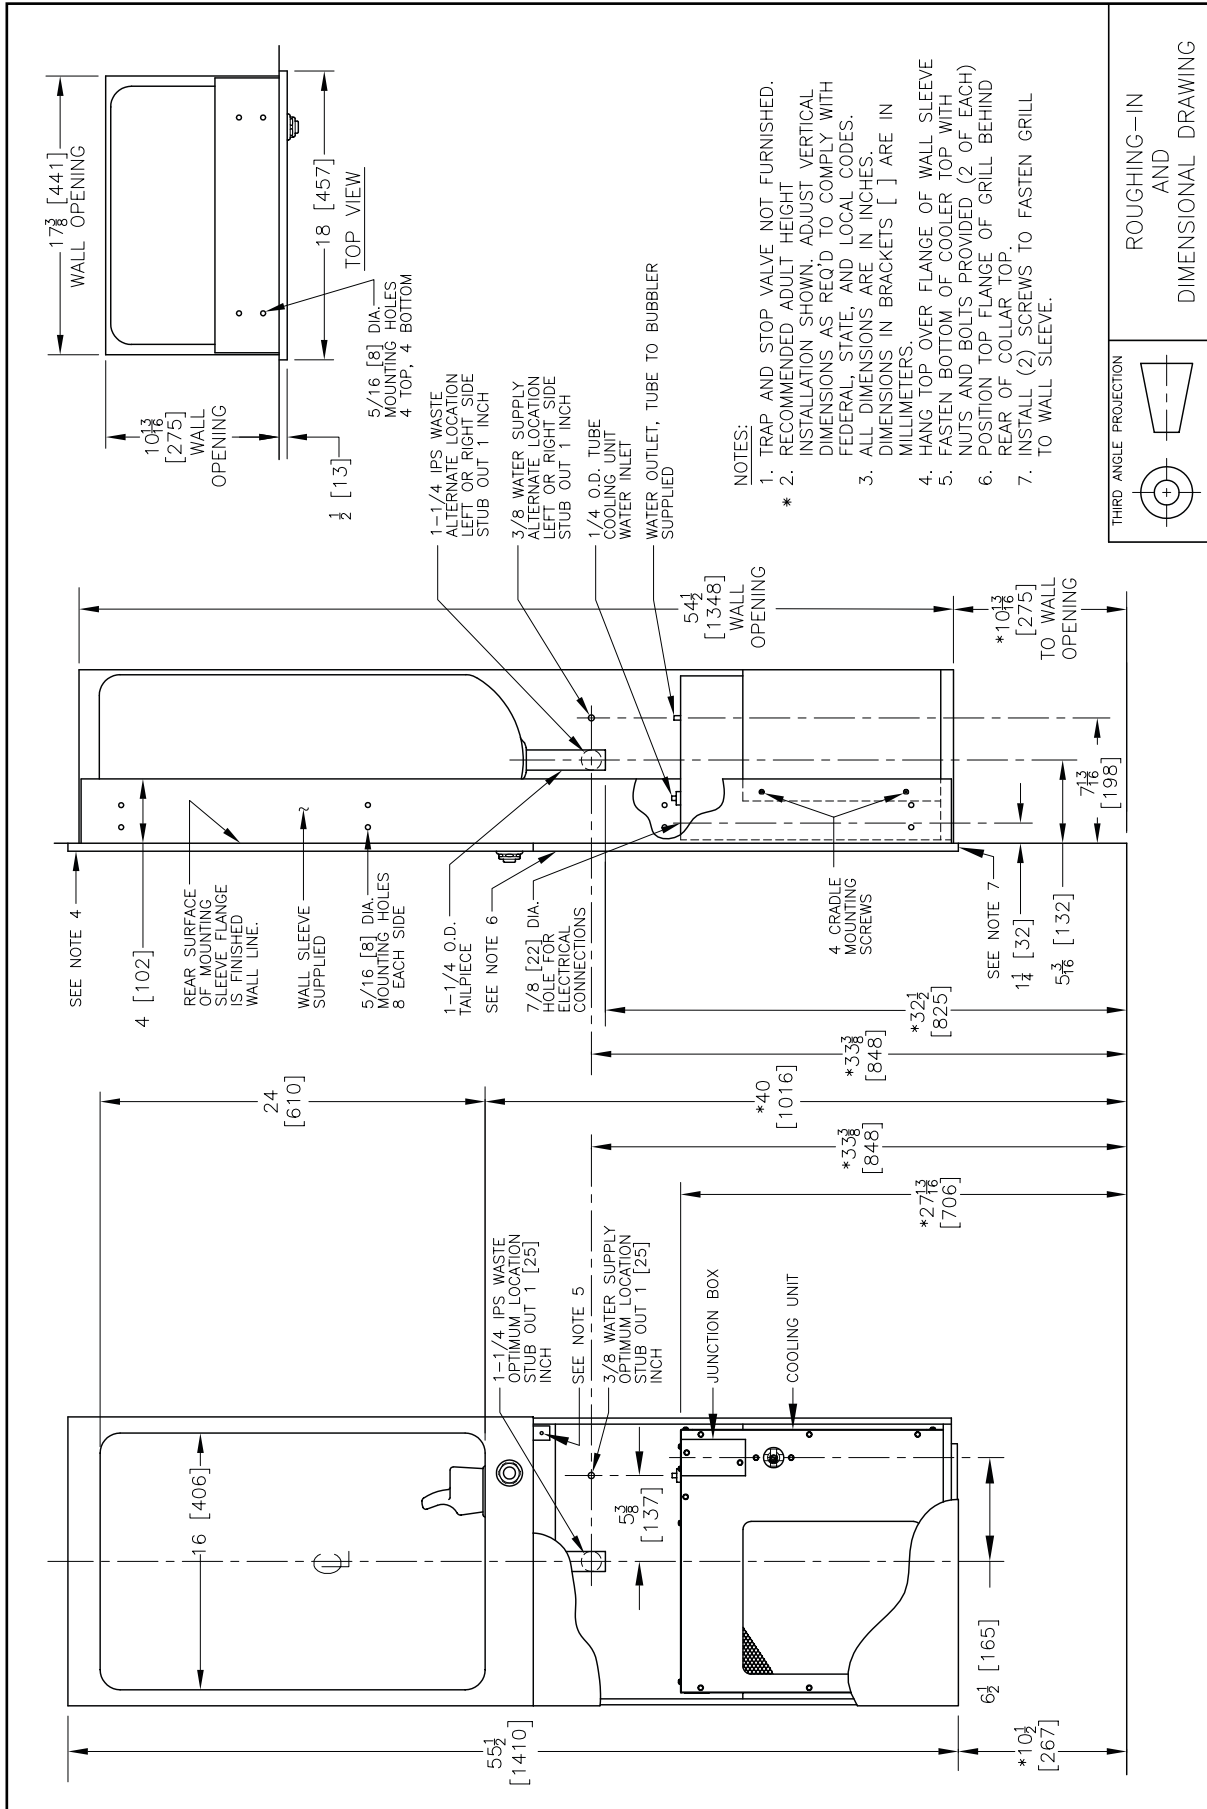

- NOTES:
- TRAP AND STOP VALVE NOT FURNISHED.
  - RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
  - ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.
  - HANG TOP OVER FLANGE OF WALL SLEEVE
  - FASTEN BOTTOM OF COOLER TOP WITH NUTS AND BOLTS PROVIDED (2 OF EACH) REAR OF COLLAR TOP.
  - POSITION TOP FLANGE OF GRILL BEHIND REAR OF COLLAR TOP.
  - INSTALL (2) SCREWS TO FASTEN GRILL TO WALL SLEEVE.

THIRD ANGLE PROJECTION

ROUGHING-IN AND DIMENSIONAL DRAWING



www.oasis.ie  
www.oasiscoolers.com  
info@oasis.ie

OASIS IRELAND  
Bunree Industrial Estate, Ballina  
Co. Mayo F26 D5R3 Ireland  
+353 96 71222

OASIS POLAND  
ul. Gutenberga 20  
44-164, Gliwice, Poland  
+48 32 332 65 01