

VERSAFILLER PVSBFSL

Manual, Non-Refrigerated, Split-Level, Vandal-Resistant
Hydration Station Combo

This surface mount hydration station combo is manually activated. The bottle filler requires a push of the touch-button, while the drinking fountains are activated via the vandalresistant touch-buttons.


Key Versafiller moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



MODEL CODE	PV8SBFSLY 504131E + 507012	PVSBFSL 507327
ACTIVATION	Bottle Filler: Manual (Touch-button) Drinking Fountain: Manual (Touch-button)	
FILTRATION	Green Filter (optional), Built-in 100 micron strainer	
AUTO-OFF WATER FLOW	No	
DRAINAGE TYPE	Built in drain, Removable drip tray	
EXTERIOR	Antimicrobial ABS Plastic, Brushed Stainless Steel	
CHASSIS	Heavy Duty Galvanised Steel	
DIMENSIONS	960(H) x 895(W) x 473(D)	
ALCOVE HEIGHT	330 mm	
NET WEIGHT	43 kg	27 kg
POWER SUPPLY	220-240V, 50/60 Hz	-
COOLING PERFORMANCE	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)	-
FULL LOAD AMPS	2.2A	-
RATED WATTS	450 W	-
ENERGY SYSTEM	Refrigeration is on only when in use or if water temp increases during long period of standby.	-
COUNTRY OF ORIGIN	Mexico	
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS), WRAS	
WARRANTY	1 Year	

Technical Sheet

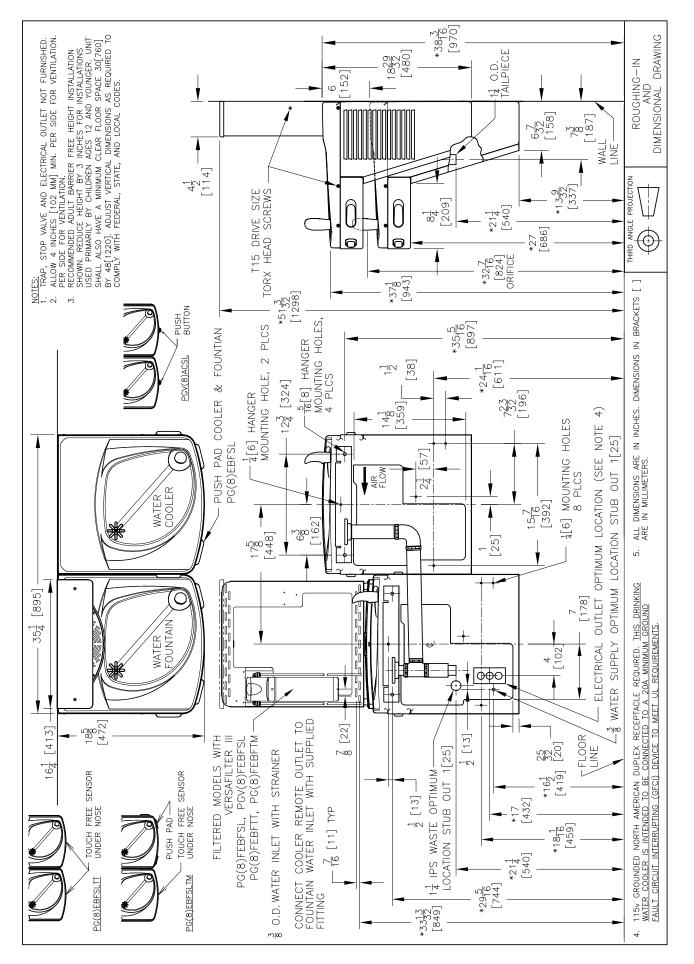



www.oasiscoolers.eu info@oasis.ie OASIS IRELAND Bunree Industrial Estate, Ballina, Co. Mayo, F26 D5R3. Ireland. +353 96 71222 OASIS POLAND

ul.Gutenberga 20, 44-164, Gliwice, Poland +48 32 332 65 01

EEBC0012-S-2401