HYDRATION STATIONS

Bottle Fillers & Drinking Fountains

WATER WHERE YOU NEED IT

MAINS-FED COOLERS

COUNTERTOP DISPENSERS

BOTTLED WATERCOOLERS

DRINKING FOUNTAINS + BOTTLE FILLERS

OASIS is the worldwide leader of water-friendly solutions. We design and manufacture an array of product, specialising in bottled + mains-fed watercoolers, bottle fillers, drinking fountains; with technologies to filter and disinfect water for the safest hydration.

CONTENTS

SECTORS
- Trusted Globally 4
- Installations 5

HIGHLIGHTS
- Electronic 6
- Mechanical 7

FEATURES
- Quasar 8
- Trifecta of Hygiene 10
- Certifications 11

BOTTLE FILLERS
- Cactus (Outdoor) 12
- Wall-Mount
  - In-Wall 15
  - On-Wall 15
- Floor Standing
  - Free Standing 19
- Essence 20
- Conversion Kit 22

BOTTLE FILLER DRINKING FOUNTAIN COMBO
- On-Wall type (single & double) 23
- In-A-Wall 25

DRINKING FOUNTAINS
- On-Wall Sink type (single & double) 27
- Modular type
  - Refrigerated 29
  - Non-Refrigerated 31
- Free Standing 33
- Bottle Filler Conversion Kit 35

ACCESSORIES 36

INSTALLATION KIT 37

FILTERS 38

Trusted Globally

TRANSPORTATION HUBS

Birmingham Airport

ATHENS INTERNATIONAL AIRPORT ELEFTHERIOS VENIZELOS

LISBON AIRPORT

CORPORATE

The Scottish Parliament Pàrlamaid na h-Alba

TAJ MAHAL

Disneyland PARIS

FITNESS + SPORTS FACILITIES

The Championships Wimbledon

LORD'S THE HOME OF CRICKET

CROKE PARK

EDUCATION

SAPIENZA UNIVERSITÀ DI ROMA

American School of The Hague

UNIVERSITY OF LIMERICK OLLSCOIL LUIMNIGH

HEALTHCARE

ASSISTANCE PUBLIQUE HÔPITAUX DE PARIS

OASIS' Pressure Watercoolers cater to an endless variety of environments. Predominantly in public and social areas that share high volume of users on a daily basis. This is where product demand and sanitisation risks are both at their peaks.

With this in mind, **OASIS** continually ensures that our products are the most hygienic and healthful. With the incorporation of advanced technology and by accomplishing design & engineering feats, means that ease of sanitisation has never been easier.

Our units are sustainable, with reliability you can count on - just like our continuous support system we provide before and after sales.

Over 100 years of high quality design and manufacturing.

INSTALLS ACROSS A MULTITUDE OF SECTORS...

ELECTRONIC
HIGHLIGHTS

TRIFECTA OF HYGIENE

- Contactless Activation: Eliminates potential cross-contamination
- Quasar UVC-LED: UVC-LED Technology at the point-of-dispense
- Freshield: Freshield utilises a silver-based antimicrobial compound

WATER

- Bottle Counter: Illustrates how many plastic bottles are saved from landfill
- Filtration w/ Filter Status Light: Know when your filter is working, and when it is ready to be replaced (Filters available with Mechanical units, Status Light feature of Electronic models only)
- Chilled Water: Choose the water of your choice, from 90 LPH, 60 LPH or ambient (also available in Mechanical model)
- Fully Mechanical Cartridge: Allows access to fresh drinking water even when electrical power is lost.

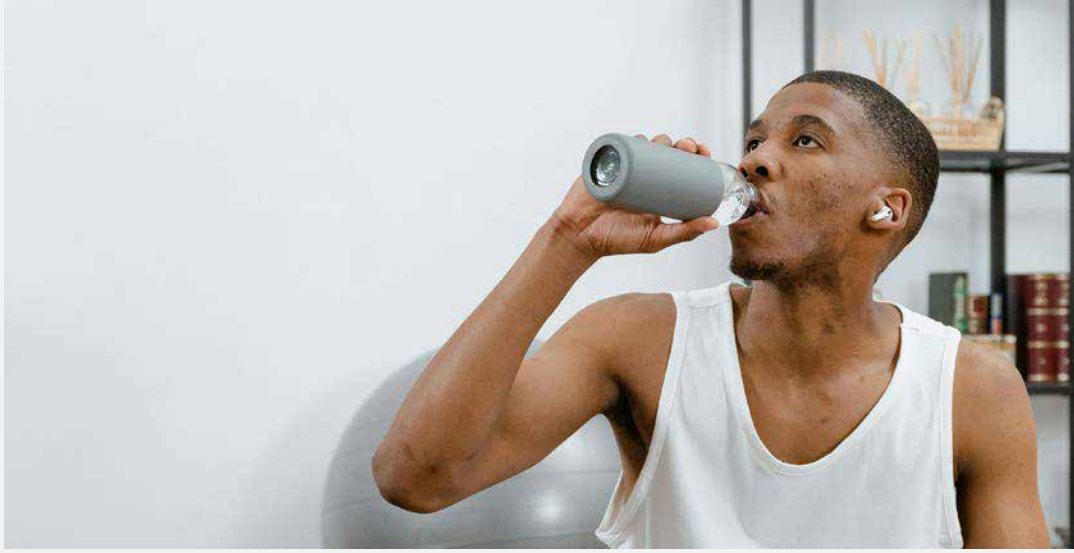

MECHANICAL
HIGHLIGHTS

HYGIENE

- Freshield*: Freshield utilises a silver-based antimicrobial compound
- Filtration*: Benefit from clean drinking water

BENEFITS FOR PREMISES

- More flexible installation locations - Requires water mains only
- Reduce Carbon Footprint: No electricity required; No refrigerant required.
- Tilt ‘n’ Tether*: Bottle filler now tips forward to allow for easier access to filters
- Quick and Easy access by removing only two screws
- Manual Activation: Push Button activation

*Available in both electronic and mechanical models (VersaFiller models only)

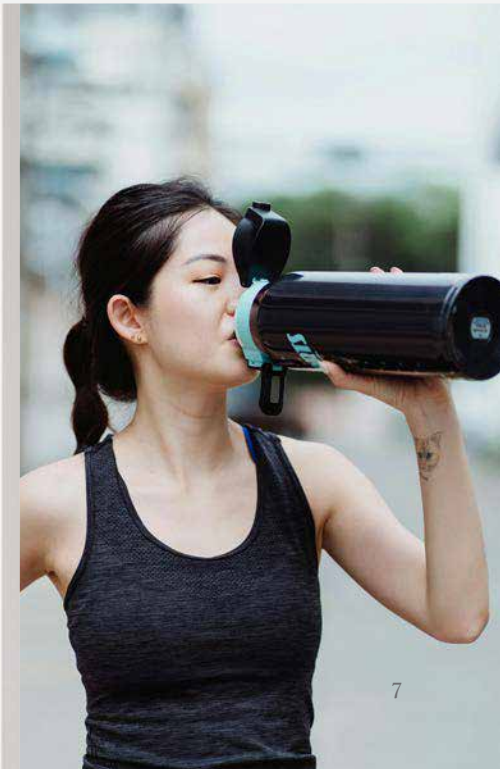

QUASAR

UVC-LED WATER TREATMENT

The OASIS QUASAR UVC-LED Water Treatment system uses UVC-LEDs to protect people from Legionella and other harmful pathogens. Treating water at the point of dispense, QUASAR uses Light Emitting Diodes (LEDs) to generate high levels of UV photons. The rays are directed at viruses, bacteria, and other pathogens within drinking water to render those pathogens harmless in seconds.

UVC-LED TECHNOLOGY

UV represents wavelengths that fall between visible light and x-ray on the electromagnetic spectrum. UV photons penetrate harmful microscopic organisms and damage the DNA, rendering them incapable of reproduction.

UVC-LED technology is used to biologically destroy harmful bacteria and viruses, without the use of chemicals or mercury-based lamps. The UVC-LEDs allow for instant full-intensity power, unlimited cycling, and no heat transfer to the water.

QUASAR: EXCLUSIVELY THROUGH OASIS

Quasar **VS** Traditional

PATHOGEN CONTROL

UVC-LED technology disinfects the water when it is being dispensed, eliminating the chance of recontamination and reducing over 99.99% of pathogens. Including legionella, chlorine resistant micro-organisms such as cryptosporidium and giardia.

MERCURY CONTENT

UVC-LED technology far outpaces traditional UV technology. Conventional UV lamps typically use between 5-200 mg of mercury per lamp, often requiring routine replacement due to the fragile quartz tube. UV LED lamps on the other hand are a much safer alternative as it is mercury-free.

WATER ALTERATION

Moreover, conventional UV while superior over chemical solutions, has a higher impact on the water temperature and causes fouling; altering the taste of water. In contrast, LED technology is easier to maintain and use, with a longer lamp replacement interval.

LONGEVITY

UVC-LED technology is easier to maintain and use, with a longer lamp replacement interval. UVC-LEDs will last ten year and more. Making them cheaper to run than traditional lamps.

PROTECTION

UVC-LEDs are only on during water dispense or standby mode for constant protection. UVC-LEDs pulse on every 10 minutes for a short duration to keep the dispense point sanitised.

TRIFECTA OF HYGIENE

CONTACTLESS

Solenoid-activated water flow for a hygienic, hands-free operation. Abandon the bubbler for safe, touch-free operation.

FRESHIELD

Freshield® technology, utilizing a silver-based antimicrobial compound to protect surfaces from discoloration, odors, and degradation.

QUASAR

UVC-LED at the point-of-dis - pense, neutralizing 99.99% of pathogens.

CERTIFICATIONS

ISO 9001:2008
Quality management systems

ISO 14001:2004
Environmental management systems

ISO 22000:2005
Food safety management systems

CCC
Approval from the Chinese MOH to sell their products in China.

SASO
Certificate of Conformity for Exports to Saudi Arabia

UL
UL Low Lead Certification

ACS (Attestation de Conformité Sanitaire)
The material safety approval required for materials and products in contact with drinking water in France.

CE
Independently CE approval for all 230V products manufactured for European market.
(Certificates: NTR-CCA, CB, EMC, Statements on conformity with European Directives LVD and EMC)

NSF REG4 Certification
certifies water fittings and non-metallic materials that are in contact with drinking water are in compliance with the UK's regulations and byelaws.

WRAS
The Water Regulations Advisory Scheme (WRAS) approval is required for many drinking water treatment devices and other products sold in the U.K. and Northern Ireland.

2011/65/EU
RoHS Directive

2014/35/EU
Low Voltage Directive

2014/30/EU
Electromagnetic Compatibility Directive

Regulation EU 202/2014
Relating to plastic materials and articles intended to come into contact with food

Regulation EC 1935/2004
Relating to materials and articles intended to come into contact with food

SUSTAINABLE HYDRATION with
OASIS Outdoor Family Bottle Fillers
CACTUS COLLECTION
Eco-friendly | Durable | Easy to Install

BOTTLE FILLERS OUTDOOR

CACTUS

OASIS Outdoor units are perfectly paired with the industry-exclusive outdoor filters, which are suitable for environments of up to 50 °C.

STANDARD FEATURES

- Requires no electricity, for easy installation and maximum flexibility in placement.
- Manual Activation via the push-button.
- Vandal-resistant and corrosion-resistant cabinetry ensures durability in any environment.
- Bottle filler designed with open-sided alcove for easy access.
- Available in the following standard colours:
  - White
  - Forest Green
  - Navy

- Optional OASIS Outdoor Filter.
- The Anchor Assembly is the necessary accesory to secure your Oasis Cactus Bottle Filler and Cactus Duo to the ground.

  -Dimension: 356 x 356 x 362 mm
  -Weight: 16.5 kg

Bottle Filler + Drinking Fountain Combo

Cactus

Cactus Uno

Cactus Duo

Cactus Wall

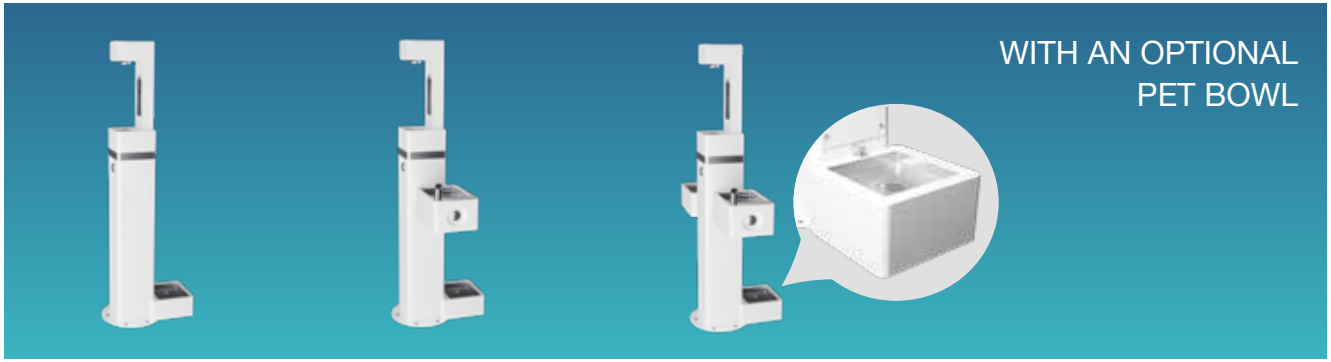

Accessories

Anchor Assembly

Pet Bowl

	CACTUS	CACTUS UNO	CACTUS DUO	CACTUS WALL
Net Weight	31.2 kg	43 kg	52 kg	9 kg
Dispense Height	380 mm	380 mm	380 mm	380 mm
Dimensions	1600 (H) x 365 (Base diameter) mm	1600 (H) x 725 (W) x 365 (D) mm	1600 (H) x 1195 (W) x 365 (D) mm	788 (H) x 216 (W) x 514 (D) mm
Net Weight (Pet Bowl)	7.3 kg	7.3 kg	7.3 kg	-

Specifications subject to change without notice. CABO/ANSI A117.1 are applicable to all models.

BOTTLE FILLERS

AQUAPOINTE HYDRATION STATION

STANDARD FEATURES

- Floor Standing (Against-a-wall)
- Contactless sensor for touch-free activation with 20 second shut-off timer
- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- High efficiency cooling tank and coil
- (Refrigerated model only)
  Energy-Efficient refrigeration system powers ‘ON’ only
- when in use or if water temp increases
- Removable drip tray grill for easy cleaning
- Heavy duty galvanized steel frame
- Programmable automatic shut off timer
- Refrigerant R-290a (Refrigerated model only)
- Built in bottle counter, filter monitor and programmable time-out feature
- White painted standard finish
- Access Door for easy maintenance; simple access to filters and chiller
- Litter-Resistant sloped top
  Available in customizable colours and wrappings (MOQ & Leadtimes may vary)

MWSBF RW
MW2SBFY RW
MW8SBFY RW

MWEBQY RW
MW2EBQY RW
MW8EBQY RW

MWEBFY RW
MW2EBFY RW
MW8EBFY RW

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	MWEBQY RW	MW2EBQY RW	MW8EBQY RW	MWEBFY RW	MW2EBFY RW	MW8EBFY RW	MWSBF RW	MW2SBFY RW	MW8SBFY RW
Rated Capacity	-	19.5 LPH	60 LPH	-	19.5 LPH	60 LPH	-	19.5 LPH	60 LPH
Rated Watts	7 W	102 W	347 W	7	102 W	347 W	-	95 W	340 W
Net Weight	69 kg	60 kg	69 kg	45 kg	60 kg	69 kg	45 kg	60 kg	69 kg
Dispense Height	292 mm	292 mm	292 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm
Dimensions	1645 (H) x 700 (W) x 351 (D) mm								

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice.
ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

QUASAR Refrigerated Contactless Bottle Counter

Oasis Floor Standing (against a wall) units provide ample space for potential branding.

Emphasise sustainable hydration and visibily partner your brand with this green initiative. Or, if your premise is being sponsored, these units are the perfect opportunity for their brand to be promoted.

MOQ required for wrapping services. Speak with your local Sales Representative for more information.

PUSH YOUR BRAND'S VISIBILITY

OR COMMERCIALISE YOUR SPACE

SUSTAINABLE
HYDRATION

FILL
REFRESH
REPEAT

SUSTAINABLE &
CUSTOMISABLE
PRODUCT

FILL
REFRESH
REPEAT

BOTTLE FILLERS
WALL MOUNT

STANDARD FEATURES

- Built-in 100 micron strainer stops particles before they enter the waterway
- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers ‘ON’ only when in use or if water temp increases
- Waterways are Lead-Free in materials &construction
- Heavy duty galvanized steel frame
- Brushed stainless steel finish
- Programmable automatic shut off timer
- Refrigerant R-290a (Refrigerated model only)

ON-A-WALL SEMI-RECESSED

ON-A-WALL SURFACE MOUNT

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	MW8EBQY	MWEBQY	MW8EBFY	MWEBFY	MW8SBFY	MWSBF	MWSM8EBQY	MWSMEBQY	MW8SMEBFY	MWSMEBFY	MW8SMSBFY	MWSMSBF
Rated Capacity	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	60 LPH	60 LPH	-
Rated Watts	347 W	7 W	347 W	7 W	340 W	-	347 W	7 W	347 W	347 W	347 W	-
Net Weight	34 kg	10 kg	34 kg	10 kg	34 kg	10 kg	34 kg	10 kg	34 kg	34 kg	34 kg	10 kg
Dispense Height	292 mm	292 mm	330 mm	330 mm	330 mm	330 mm	292 mm	292 mm	330 mm	330 mm	330 mm	330 mm
Dimensions	1035 (H) x 502 (W) x 46 (D) (287recessed) mm						1051(H) x 530 (W) x 150 (D) (198 recessed for chiller) mm					

ON-A-WALL SURFACE MOUNT

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	PN8EBQY	PN8EBFY	PWSMEBQY	PWSMEBFY	PWSMSBF
Rated Capacity	60 LPH	60 LPH	-	-	-
Rated Watts	7 W	7 W	7 W	7 W	-
Net Weight	25.4 kg	25.4 kg	5 kg	5 kg	5 kg
Dispense Height	292 mm	330 mm	292 mm	330 mm	330 mm
Dimensions	960.2 (H) x 453.2 (W) x 331.8 (D) mm			630 (H) x 413 (W) x 144 (D) mm	

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice.
ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

QUASAR · Refrigerated · Contactless · Contactless + Mechanical · Bottle Counter · Vandal Resistant

BOTTLE FILLERS

FLOOR STANDING [FREE STANDING]

STANDARD FEATURES

- Contactless sensor for touch-free activation with 20 second shut-off timer
- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers 'ON' only when in use or if water temp increases
- Removable drip tray grill for easy cleaning
- Heavy duty galvanized steel frame
- Programmable automatic shut off timer
- Refrigerant R-290a (Refrigerated model only)
- Built in bottle counter, filter monitor and programmable time-out feature
- Durable brushed stainless steel finish
- 2-Stage Filtration system provides great tasting filtered water (PF20FSEBQY model only)

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	PCPEBQY	PCP8EBQY	PCPEBFY	PCP8EBF
Rated Capacity	-	60 LPH	-	60 LPH
Rated Watts	7 W	102 W	347 W	7
Net Weight	16 kg	29 kg	16 kg	29 kg
Dispense Height	292 mm	292 mm	330 mm	330 mm
Dimensions	1505 (H) x 700 (W) x 350 (D) mm			

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice.
ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

QUASAR · Refrigerated · Contactless · Bottle Counter

The Premium and Sleek Experience

ESSENCE

BOTTLE FILLERS WALL MOUNT

ESSENCE

STANDARD FEATURES

- Sleek, contemporary design
- Large Alcove to fit most sports bottles
- Bottle filler moulded components contain Freshield
- Stainless & Plastic (ABS) exterior ("STN" models)
- Tempered Glass, Stainless & Plastic exterior ("GBL" models)
- Finish ("STN"): Stainless Steel
- Finish ("GBL") : Black Tempered Glass
- Built in drain - no drip tray to empty
- Contactless activation (IR Sensor in Alcove)
- Non-Refrigerated
- Quasar **(only PWLEBQY STN and PWLEBQY GBL)** : eliminates your worry; by killing bacteria and pathogens directly at the spout, to ensure you can enjoy safe drinking water
- Filtration (Optional)

Essence PWLEBFY GBL
Essence PWLEBQY GBL

Essence PWLEBFY STN
Essence PWLEBQY STN

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	PWLEBFY STN	PWLEBFY GBL	PWLEBQY STN	PWLEBQY GBL
Flow Rate	1,9 LPH	1,9 LPH	1,9 LPH	1,9 LPH
Net Weight	7 kg	7 kg	7 kg	7 kg
Dispense Height	330 mm	330 mm	330 mm	330 mm
Dimensions	648 (H) x 434 (W) x 112 (D) mm	648 (H) x 434 (W) x 112 (D) mm	648 (H) x 434 (W) x 112 (D) mm	648 (H) x 434 (W) x 112 (D) mm
QUASAR	No	No	Yes	Yes

RETROFIT KIT
DRINKING FOUNTAIN TO COMBO

STANDARD FEATURES

Designed to fit existing OASIS P8AC and select competitors' units

- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- Heavy duty galvanized steel frame
- Waterways are Lead-Free in materials and construction
- Brushed stainless steel finish

10° C Drinking water/ 21° C Ambient air temp. 220-240 Volts, 50/60 Hz	PWEBQY	PWEBFY	PWSBF
Rated Capacity	-	10 LPH	60 LPH
Rated Watts	7 W	102 W	347 W
Net Weight	5 kg	7 kg	5 kg
Dispense Height	292 mm	292 mm	292 mm
Dimensions		480 (H) x 413 (W) x 144 (D) mm	

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

QUASAR Refrigerated Contactless Bottle Counter

COMBO
ON-A-WALL

STANDARD FEATURES

BOTTLE FILLER

- VersaFiller Bottle Fillers
- Built-in 100 micron strainer stops particles before they enter the waterway
- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- Water-saver bubbler reduces waste water by 50%
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers ‘ON’ only when in use or if water temp increases
- Waterways are Lead-Free in materials &construction
- Heavy duty galvanized steel frame
- Ample space within the bottle filler cabinet to add filtration, including all OASIS filters
- Brushed stainless steel finish
- Programmable automatic shut off timer

DRINKING FOUNTAIN

- Versacooler Drinking Fountain
- Antimicrobial flexible bubbler guard
- Basin is designed to eliminate splashing/standing water
- Water-saver bubbler reduces waste water by 50%
- Antimicrobial flexible bubbler guard
- External stream height adjustment
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers ‘ON’ only when in use or if water temp increases

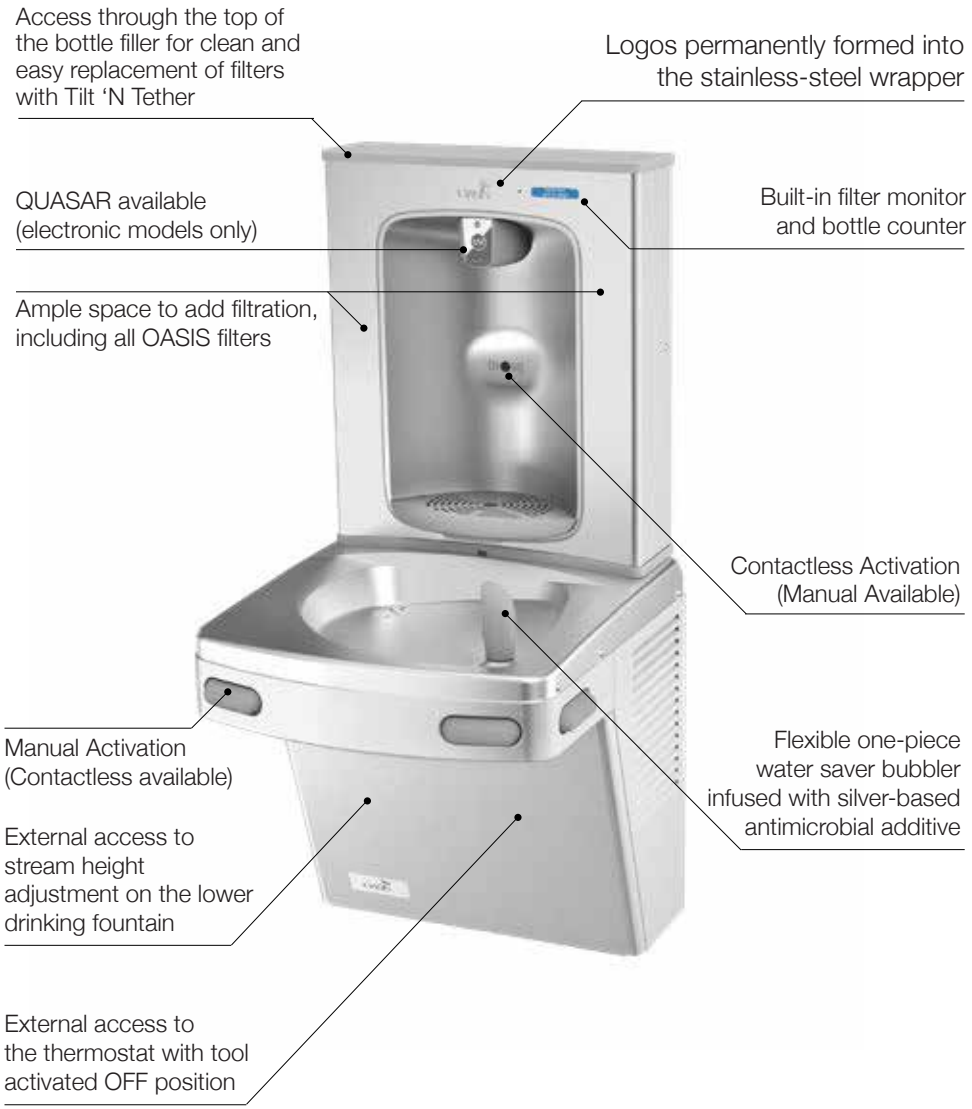

CONTACTLESS COMBO

CONTACTLESS + MECHANICAL

MECHANICAL COMBO

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	P8EBQTY	PEBQTY	P8EBFTY	PEBQTY	P8EBQY	PEBQY	P8EBFY	PEBFY	PV8EBFY	PVEBFY	P8SBFY	PSBF	PV8SBFY	PVSBF
Rated Capacity	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-
Rated Watts	475 W	7 W	475 W	7 W	475 W	7 W	475 W	7 W	475 W	7 W	450 W	-	475 W	-
Net Weight	27 kg	14 kg	27 kg	14 kg	27 kg	14 kg	27 kg	16 kg	31 kg	16 kg	31 kg	16 kg	31 kg	16 kg
Dispense Height	292 mm	292mm	330 mm	292 mm	292 mm	292 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm
Dimensions	960 (H) x 413 (W) x 473 (D) mm													

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	P8EBQSLTTY	PEBQSLTTY	P8EBFSLTTY	PEBFSLTTY	P8EBFSLY	PEBFSLY	PV8EBFSLY	PVEBFSLY	P8SBFSLY	PSBFSL	PV8SBFSLY	PVSBFSL
Rated Capacity	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-
Rated Watts	475 W	7 W	475 W	7 W	475 W	7 W	475 W	7 W	450 W	-	450 W	-
Net Weight	36 kg	23 kg	36 kg	23 kg	36 kg	23 kg	43 kg	27 kg	36 kg	23 kg	36 kg	23 kg
Dispense Height	292 mm	292 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm
Dimensions	960 (H) x 895 (W) x 473 (D) mm											

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice.
ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

QUASAR · Refrigerated · Contactless · Contactless + Mechanical · Bottle Counter · Vandal Resistant

COMBO
IN-A-WALL [RECESSED]

STANDARD FEATURES

BOTTLE FILLER

- AquaPointe Bottle Filler
- Built-in 100 micron strainer stops particles before they enter the waterway
- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers ‘ON’ only when in use or if water temp increases
- Waterways are Lead-Free in materials/construction
- Heavy duty galvanized steel frame
- Brushed stainless steel finish
- Programmable automatic shut off timer

DRINKING FOUNTAIN

- Radii Drinking Fountain
- Flexible one piece water saver bubbler guard
- Built-in 100 micron strainer stops particles
- Waterways are Lead-Free in materials/construction
- Antimicrobial flexible bubbler guard
- Heavy duty galvanized steel frame
- Brushed stainless steel finish
- High efficiency cooling tank and coil (Refrigerated model only)
- Energy-Efficient refrigeration system powers ‘ON’ only when in use or if water temp increases
- Built in Panel Locks for easy access to chiller and filtration

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	M8WREBFY	MWREBFY	M8WRSBFY	MWRSBF	M8EBFY	MEBFY	M8SBFY	MSBF	M8CREBFY	M8CRSBFY
Rated Capacity	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH	60 LPH
Rated Watts	347 W	7 W	340 W	-	347 W	7 W	340 W	-	347 W	340 W
Net Weight	64 kg	19 kg	43 kg	19 kg	42 kg	18 kg	34 kg	49 kg	61 kg	61 kg
Dispense Height	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm	330 mm
Dimensions	1143 (H) x 502 (W) x 483 (D) (287 recessed) mm				1035 (H) x 1003 (W) x 483 (D) (287 recessed) mm					

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	M140REBFY	M140RSBF	MMRSLEBFY	MMRSLSBF
Rated Capacity	-	-	-	-
Rated Watts	7 W	-	7 W	-
Net Weight	17 kg	17 kg	29 kg	29 kg
Dispense Height	330 mm	330 mm	330 mm	330 mm
Dimensions	591(H) x 502 (W) x 482 (D) (90 recessed) mm		591 (H) x 1003 (W) x 470 (D) (89 recessed) mm	

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice.
ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

QUASAR · Refrigerated · Contactless · Contactless + Mechanical · Bottle Counter · Vandal Resistant

DRINKING FOUNTAINS
ON-WALL, SINK TYPE

STANDARD FEATURES

- Built-in 100 mitcron strainer stops particles before they enter the waterway
- ADA compliant for both adult or child when properly installed
- Stainless steel top designed to eliminate splashing and standing water ANSI/NSF 61
- Water-saver bubbler reduces waste water by 50%
- Antimicrobial flexible bubbler guard
- External stream height adjustment
- Brushed stainless steel finish
- Heavy duty galvanized steel frame
- Refrigerant R-290a (Refrigerated models only)
- High efficiency cooling tank and coil
- (Refrigerated models only)
- Contactless Activation with 30 seconds auto shut-off (Contactless models)
- Vandal Resistant front push button with Tamper Proof screws (Vandal Resistant Model)

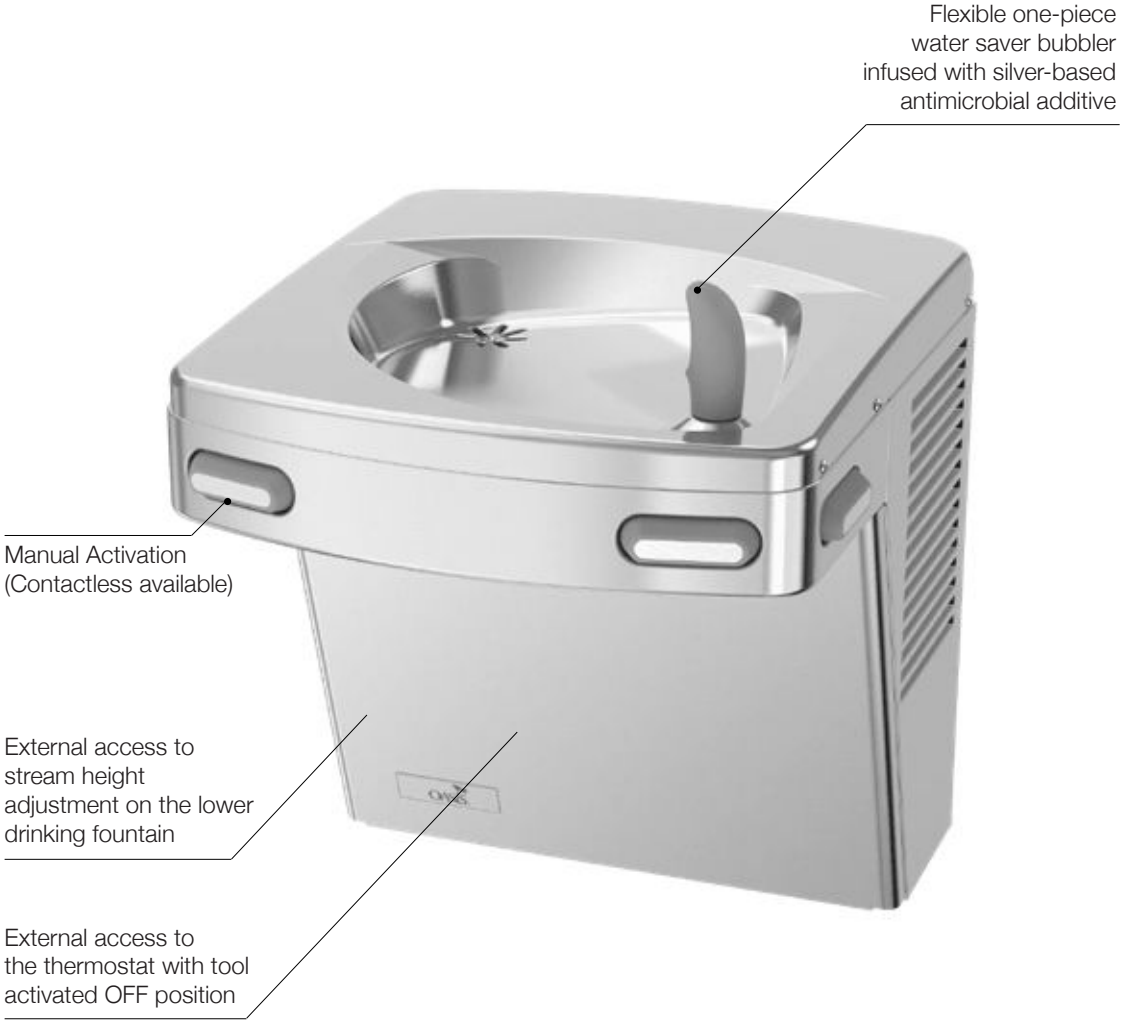

CONTACTLESS COMBO

CONTACTLESS + MECHANICAL

MECHANICAL COMBO

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	P8ACTY	PGACT	P8ACY	PGAC	PV8ACY	PVAC	PV8ACY-14G
Rated Capacity	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH
Rated Watts	475 W	7 W	475 W	7 W	475 W	7 W	475 W
Net Weight	22 kg	22 kg	22 kg	9 kg	22 kg	9 kg	22 kg
Dimensions	480 (H) x 448 (W) x 473 (D) mm		480 (H) x 448 (W) x 473 (D) mm		480 (H) x 448 (W) x 473 (D) mm		480 (H) x 451 (W) x 483 (D) mm

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	P8ACSLTTY	PACSLTMY	P8ACSLY	PACSL	PV8ACSLY	PVACSL	PV8ACSLY-14G
Rated Capacity	60 LPH	-	60 LPH	-	60 LPH	-	60 LPH
Rated Watts	475 W	7 W	475 W	7 W	475 W	7 W	475 W
Net Weight	31 kg	18 kg	31 kg	18 kg	31 kg	18 kg	31 kg
Dimensions	960 (H) x 895 (W) x 473 (D) mm						

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice.
ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

QUASAR · Refrigerated · Contactless · Contactless + Mechanical · Bottle Counter · Vandal Resistant

DRINKING FOUNTAINS
IN-WALL, MODULAR & REFRIGERATED TYPE

STANDARD FEATURES

- Flex bubbler
- Waterways are Lead-Free in materials and construction
- Stainless steel finish with heavy-duty galvanized steel frame
- Built in 100 micron strainer stops particles before they enter the waterway
- Contactless models are sensor equipped for automatic operation
- Bi-level models are field reversible

RADII MODELS

- ADA Compliant when installed in an alcove or with right and left wing walls
- Water flow stops after 30 seconds if user does not move away

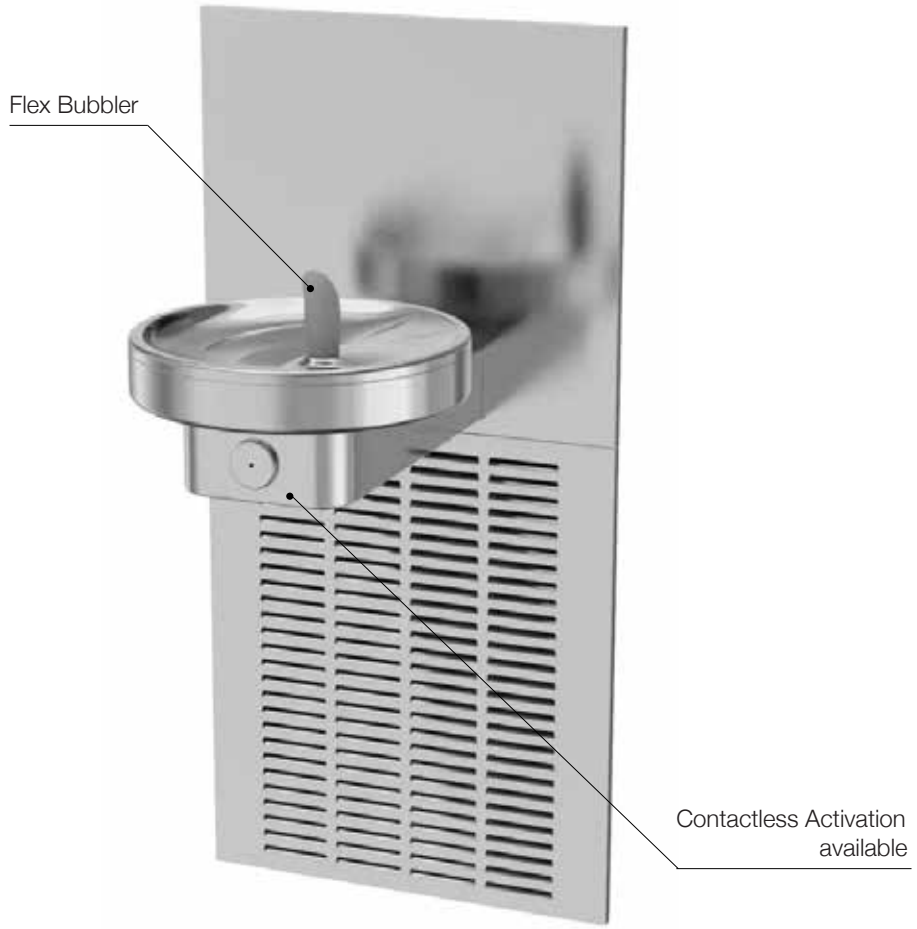

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	M8WREEY	M8WRY	M8CRY
Rated Capacity	60 LPH	60 LPH	60 LPH
Rated Watts	340	340	340
Net Weight	41 kg	41 kg	59 kg
Dimensions	1035 (H) x 502 (W) x 483 (D) (287 recessed) mm	1035 (H) x 502 (W) x 483 (D) (287 recessed) mm	1035 (H) x 1003 (W) x 483 (D) (287 recessed) mm

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	M8SBEEY	M8SCPMY	PLF8FPMY
Rated Capacity	60 LPH	60 LPH	60 LPH
Rated Watts	550 W	340 W	340 W
Net Weight	42 kg	45 kg	38 kg
Dimensions	1035 (H) x 502 (W) x 483 (D) (287 recessed) mm	1035 (H) x 502 (W) x 483 (D) (287 recessed) mm	1410 (H) x 457 (W) x 13 (D) (275 recessed) mm

Refrigerated Contactless

DRINKING FOUNTAINS
MODULAR & NON-REFRIGERATED TYPE

STANDARD FEATURES

- Flex bubbler
- Waterways are Lead-Free in materials and construction
- Antimicrobial copper touch points
- Stainless steel finish with heavy-duty galvanized steel frame
- Modular fountains include back panel(s) and mounting frame(s)
- Frost proof fountains include back panel and control box assembly
- Built in 100 micron strainer stops particles before they enter the waterway

14 GAUGE MODELS

- 14 gauge stainless steel construction
- Vandal resistant bubbler keyed into position
- Single vandal resistant mechanical activation
- Brass P-Trap
- Vandal resistant panel fasteners
- Stream height adjustment

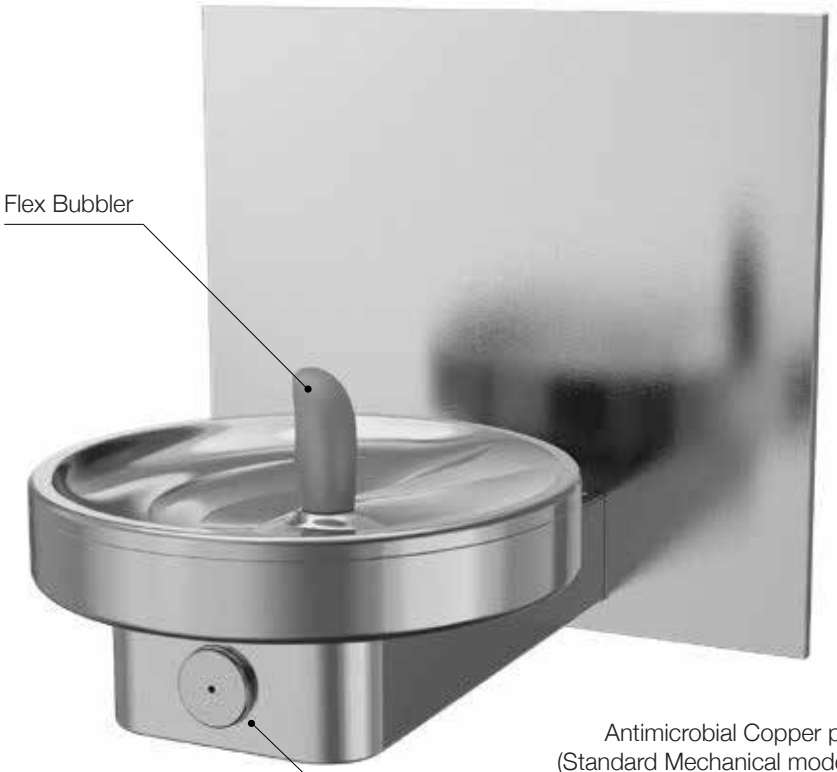

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	F140R	M140RFZ	MMRSL
Rated Capacity	-	-	-
Rated Watts	-	-	-
Net Weight	7 kg	22 kg	30 kg
Dimensions	209 (H) x 502 (W) x 470 (D) mm	466 (H) x 502 (W) x 483 (D) mm	464 (H) x 1003 (W) x 483 (D) mm

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	F140PM-14G	M140PM
Rated Capacity	-	-
Rated Watts	-	-
Net Weight	7 kg	13 kg
Dimensions	276 (H) x 305 (W) x 473 (D) mm	464 (H) x 502 (W) x 483 (D) mm

14G Heavy-duty construction (14-gauge) Vandal Resistant Frost Resistant

DRINKING FOUNTAINS
FREE STANDING TYPE

STANDARD FEATURES

- Dial-A-Drink, Adjustable Bubbler (Excluding Colorado)
- Waterways are Lead-Free in materials and construction
- Optional push handle glass filler (029603-004)
- Stainless steel finish with heavy-duty galvanized steel frame

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	PLF8CPY	COLORADO - P2KXY	PLF8FAY	PLF8FAHY
Rated Capacity	60 LPH	19.5 LPH	60 LPH	60 LPH
Rated Watts	340 W	90 W	320 W	340 W
Net Weight	32 kg	22 kg	43 kg	44 kg
Dimensions	1121 (H) x 305 (W) x 305 (D) mm	1020 (H) x 310 (W) x 310 (D) mm	1100 (H) x 432 (W) x 356 (D) mm	

Refrigerated Hot Water

DRINKING FOUNTAINS

BRACKET MOUNTED

- Dial-A-Drink, Adjustable Bubbler
- Chrome-Plated brass strainer and tailpiece
- Stainless steel basin
- Satin finish stainless steel

ON-WALL TYPE (SINGLE)

- Dial-A-Drink, Adjustable Bubbler
- Stainless steel surfaces
- Anti-Splash ridge
- Easy-To-Clean integral strainer grid
- Bottom cover plate

FULLY RECESSED (SINGLE)

- Satin finish stainless steel surfaces
- Push-Button on cabinet front keeps water flowing while button is depressed
- Removable chrome-Plated brass drain strainer
- Built-in pressure regulator assures smooth, steady water flow

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	FLF120	F100	FLF211PM
Rated Capacity	-	-	-
Rated Watts	-	-	-
Net Weight	3 kg	7 kg	17.9 kg
Dimensions	233 (H) x 330 (W) x 333 (D) mm	225 (H) x 432 (W) x 331 (D) mm	889 (H) x 457 (W) x 13 (D) (267 recessed) mm

CONVERSION KIT
DRINKING FOUNTAIN TO BOTTLE FILLER

STANDARD FEATURES

Convert an existing Drinking Fountain to a Bottle Filler in moments.

- Contactless activation with shut off timer
- Large Alcove to fit most sports bottles
- Built in drain - no drip tray to empty
- Side access panels to filters
- Heavy duty galvanized steel frame
- Waterways are Lead-Free in materials and construction
- Brushed stainless steel finish

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	NNEBFEZ	NNEBFPG
Rated Capacity	-	-
Rated Watts	7 W	7 W
Net Weight	8 kg	7 kg
Dispense Height	292 mm	330 mm
Dimensions	960.2 (H) x 453.2 (W) x 331.8 (D) mm	

*All performance data measured with 18°C inlet water temperature. Specifications subject to change without notice. ANSI/NSF 61 and CABO/ANSI A117.1 are applicable to all models.

QUASAR Contactless Bottle Counter

ACCESSORIES

WATER CHILLER

- East Installation
- Waterways are Lead-Free in materials and construction
- High efficiency stainless steel cooling tank
- Made of heavy-gauge steel
- Refrigerant R-290a

10° C Drinking water/
21° C Ambient air temp.
220-240 Volts, 50/60 Hz

	RLF8Y Remote or In-A-Wall	R2Y Remote or In-A-Wall
Rated Capacity	60 LPH	19.5 LPH
Rated Watts	340 W	95 W
Net Weight	24 kg	14.6 kg
Dispense Height	406 (H) x 417 (W) x 262 (D) mm	435 (H) x 282 (W) x 399 (D) mm

BUBBLERS

Antimicrobial Water Saver Flex Type

One-piece, tamper-proof, non-regulated antimicrobial bubbler for table-type drinking fountains and Radii models

Part no.035607-111

Metal

Tamper-proof, chrome plated brass, and non-regulated antimicrobial bubbler for table-type drinking fountains and Radii models

Part no.0356700-001

Adjustable (Flexible guard)

Dial-A-Drink Adjustable Bubbler with Flexible Bubbler Guard

Part no.030774-006
Mains water pressure 20-110 psi
Part no. 030774-015
Mains water pressure <20 psi

Adjustable (Chrome plated guard)

Dial-A-Drink Adjustable Bubbler with Flexible Bubbler Guard

Part no.030774-016
Mains water pressure 20-110 psi



Constant Flow

Constant flow bubbler with flexible bubbler guard

Part no.030774-025

ETC.

OASIS Green Filter

OASIS Green Filter can be factory installed at an extra cost. Ask for our green Filter price list and description.

Colarado Glass Filler

Chrome Glass Filler for the Colorado (P2KXY) Free Standing Cooler

Part no.034912-001

Glass Filler

Chrome Glass Filler Assy, Push Handle

Part no.029603-004

INSTALLATION KIT

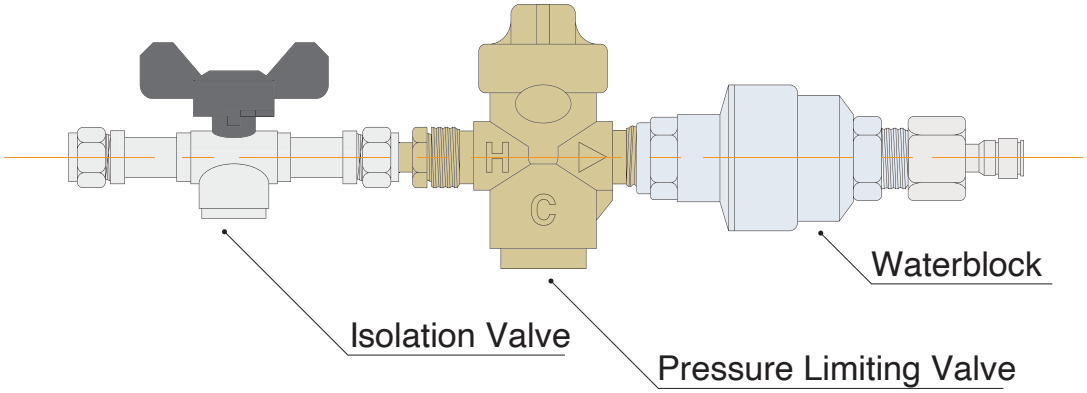

(Compression Fitting Version 034653-003)

This kit is an ‘all in one rail’, which when properly installed will regulate the feed water used to supply a water dispensing device.

The kit includes an isolation valve with double non return, a pressure limiting valve set at 3 bar and a water block, which will stop the water flow if a pre set volume has been exceeded. The inlet of the kit is 15mm compression and the outlet is 1⁄4” push fit.

This kit should only be fitted to a mains cold water supply / boosted mains, not a tank fed supply.

The kit features twin ‘type approved’ non return valves and thereby complies with the current WRAS / EPDWA regulations for supplying coolers and carbonators.

INSTALLATION PROCEDURE

The feed water kit should be fitted to a suitable 15mm mains cold water pipe made of copper. Alternative kits are available for plastic pipe work, please consult your supplier. The pipe work should be clean, free from bends / dents and should not be painted. The kit should be mounted vertically and in a position to allow for the access to individual components, for altering the settings.

ALTERING THE SETTINGS

To alter the maximum feed water pressure, turn the slot on top of the chrome pressure limiting valve either clock / anti – clockwise.
To alter the maximum volume of water to be discharged in any given instance, firstly remove the 3⁄4” x 1⁄4” adaptor from the outlet of the grey water block device. Inside the outlet there is a pointer that can be aligned with one of the figures around the circumference. Each figure equates to 1 gallon (3.8 litres). A standard kit is set on 2 (i.e. 9 litres). The maximum setting is approximately 50 litres.

FILTERS

EZ Clip (In-line) Green Filter

- Connected to flexible water tubing with a simple push into-place fitting at the top and bottom of the filter
- The filter body is secured to the wall by pushing it into a C-Clip
- Ideal in situations where simplicity and space are a priority

EZ Turn (Quarter-turn) Green Filter

- Connected to flexible water tubing with a simple push into-place ftting at the water entry and exit valves in the head of the flter
- A no-spill valve allows to disconnect the filter body from the filter head without spilling any water
- The filter body is installed into the head with a simple quarter-turn

Improve the taste and quality of Your Drinking Water with OASIS Green Filter System

LIMIT WASTE WITH SUSTAINABLE & HEALTHY HYDRATION

- Interchangeable filter media.
- Reusable housing reducing significant waste in comparison to alternative filters on the market.
- Simple installation.
- Easy maintenance with filter changes every 6 months.
- Two filter housing designs for a perfect fit in any environment.
- Cleaning Cartridge: replace filter media with sanitizing solution to create a cleaning cartridge that can be used to sanitize all water contact surfaces inside your mains-fed machine.
- OUTSIDE-IN filtration for maximum filtration efficiency with a minimal drop in pressure and low risk of blockage.

The OASIS green filter range of products are tested in accordance with NSF/ANSI Standard 42 for Chlorine, Taste & Odour and, where stated,NSF/ANSI Standard 53 for Cyst.

green® filter

The OASIS Green Filter System is a patented reusable system

FILTERS

Cartridge Type	SEDIMENT	CARBON BLOCK	CARBON / PHOSPHATE	CARBON / SILVER / PHOSPHATE	CERAMIC	GALAXI	GALAXI / PHOSPHATE	REMEDI	REMEDI / PHOSPHATE
µ rating [µm]	5	1	1	1	0.5	0.5	0.5	1.4 - Equiv. to 0.2	1.4 - Equiv. to 0.2
CTO (L)	—	3 800	3 800	19 000	—	6 500	6 500	2,800	2,800
Scale Reduction (polyphosphate beads)	—	—	26 000	26 000	—	—	26 000	—	26 000
Sediment reduction	+	+	+	+	+	+	+	+	+
Lead reduction (L)	—	—	—	—	—	10 000	10 000	830 at pH 8.5	830 at pH 8.5
Cyst reduction	—	—	—	—	+	+	+	+	+
Antimicrobial	—	—	—	25 000	+	25 000	25 000	+	+
Pathogenic bacteria, micro-organisms reduction	—	—	—	—	+	+	+	+	+
Viruses reduction	—	—	—	—	—	—	—	+	+
Pharmaceutical + Chemical waste reduction (L)	—	—	—	—	—	—	—	100 000	100 000

Outdoor Filter

AIR TEMPERATURE	2°C to 50°C
FLOW RATE	5.68 LPM
PRESSURE	1.4 bar to 8.6 bar
CAPACITY	17,980 L
SERVICE LIFE	12 months
SEDIMENT	Down to nominal 0.5 micron
FUNCTION	Mechanical / Chemical filtration
INSTALL LOCATION	For outdoor use

Get In Touch

www.oasiscoolers.eu
info@oasis.ie